

Three Phase Bridge, 130/160 A (Power Modules)



FEATURES

- Package fully compatible with the industry standard INT-A-PAK power modules series
- High thermal conductivity package, electrically insulated case
- Excellent power volume ratio
- 4000 V_{RMS} isolating voltage
- UL E78996 approved
- Totally lead (Pb)-free
- Designed and qualified for industrial level



DESCRIPTION

PRODUCT SUMMARY	
I _O	130/160 A

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

MAJOR RATINGS AND CHARACTERISTICS				
SYMBOL	CHARACTERISTICS	130MT.K	160MT.K	UNITS
I _O		130 (160)	160 (200)	A
	T _C	85 (62)	85 (60)	°C
I _{FSM}	50 Hz	1130	1430	A
	60 Hz	1180	1500	
I ² t	50 Hz	6400	10 200	A ² s
	60 Hz	5800	9300	
I ² √t		64 000	102 000	A ² √s
V _{RRM}	Range	800 to 1600		V
T _{Stg}	Range	- 40 to 150		°C
T _J				

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V _{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V _{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I _{RRM} MAXIMUM AT T _J = MAXIMUM mA
130-160MT..K	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

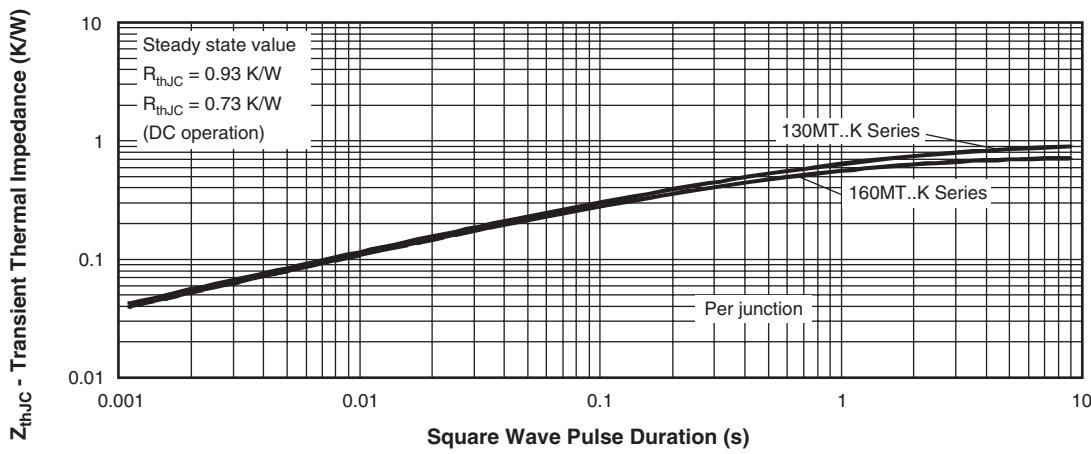
130-160MT..KPbF Series

Vishay High Power Products Three Phase Bridge, 130/160 A
(Power Modules)



FORWARD CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS			130MT.K	160MT.K	UNITS	
Maximum DC output current at case temperature	I_O	120° rect. conduction angle			130 (160)	160 (200)	A	
					85 (62)	85 (60)	°C	
Maximum peak, one-cycle forward, non-repetitive surge current	I_{TSM}	$t = 10 \text{ ms}$	No voltage reapplied	Initial $T_J = T_J$ maximum	1130	1430	A	
		$t = 8.3 \text{ ms}$			1180	1500		
		$t = 10 \text{ ms}$	100 % V_{RRM} reapplied		950	1200		
		$t = 8.3 \text{ ms}$			1000	1260		
Maximum I^2t for fusing	I^2t	$t = 10 \text{ ms}$	No voltage reapplied	Initial $T_J = T_J$ maximum	64 000	102 000	A^2s	
		$t = 8.3 \text{ ms}$			5800	9300		
		$t = 10 \text{ ms}$	100 % V_{RRM} reapplied		4500	7200		
		$t = 8.3 \text{ ms}$			4100	6600		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1 \text{ to } 10 \text{ ms}$, no voltage reapplied			64 000	102 000	$\text{A}^2\sqrt{\text{s}}$	
Low level value of threshold voltage	$V_{T(TO)1}$	$(16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, T_J maximum			0.78	0.81	V	
High level value of threshold voltage	$V_{T(TO)2}$	$(I > \pi \times I_{T(AV)})$, T_J maximum			0.99	1.04		
Low level value of forward slope resistance	r_{f1}	$16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)}$, T_J maximum			4.59	3.52	$\text{m}\Omega$	
High level of forward slope resistance	r_{f2}	$(I > \pi \times I_{T(AV)})$, T_J maximum			4.17	3.13		
Maximum forward voltage drop	V_{FM}	$I_{pk} = 200 \text{ A}$, $T_J = 25 \text{ °C}$, $t_p = 400 \mu\text{s}$ single junction			1.63	1.49	V	
RMS isolation voltage	V_{ISOL}	$T_J = 25 \text{ °C}$, all terminal shorted $f = 50 \text{ Hz}$, $t = 1 \text{ s}$			4000			

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS		130MT.K	160MT.K	UNITS
Maximum junction operating and storage temperature range	T_J , T_{Stg}			- 40 to 150		°C
Maximum thermal resistance, junction to case	R_{thJC}	DC operation per module		0.16	0.12	K/W
		DC operation per junction		0.93	0.73	
		120° rect. conduction angle per module		0.18	0.15	
		120° rect. conduction angle per junction		1.08	0.88	
Maximum thermal resistance, case to heatsink	R_{thCS}	Per module Mounting surface smooth, flat and greased		0.03		
Mounting torque $\pm 10 \%$ to heatsink to terminal		A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		4 to 6	Nm	
Approximate weight		Lubricated threads.		3 to 4		
				176	g	

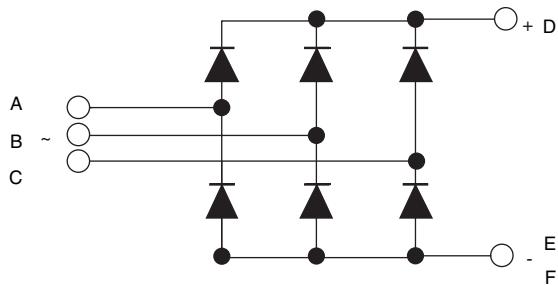

 Fig. 11 - Thermal Impedance Z_{thJC} Characteristics

ORDERING INFORMATION TABLE

Device code	16	0	MT	160	K	PbF
	(1)	(2)	(3)	(4)		(5)
[1]	-	Current rating code: 13 = 130 A (average) 16 = 160 A (average)				
[2]	-	Three phase diodes bridge				
[3]	-	Essential part number				
[4]	-	Voltage code x 10 = V_{RRM} (see Voltage Ratings table)				
[5]	-	PbF = Lead (Pb)-free				

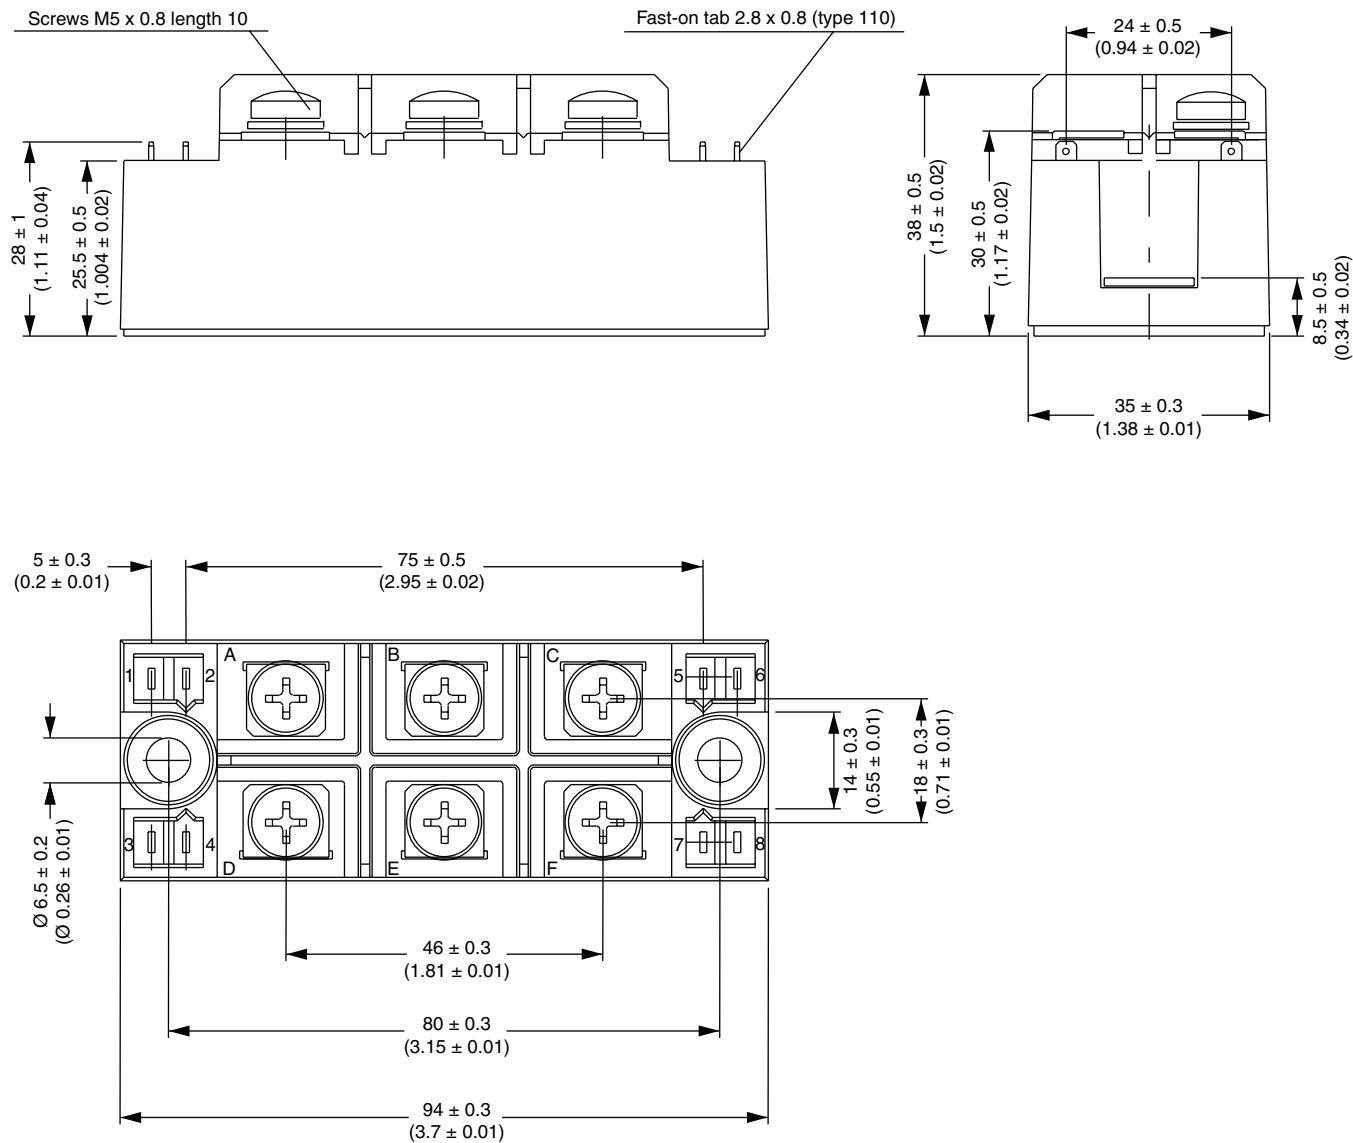
Note

- To order the optional hardware go to www.vishay.com/doc?95172

CIRCUIT CONFIGURATION


MTK (with and without optional barrier)

DIMENSIONS WITH OPTIONAL BARRIERS in millimeters (inches)



Outline Dimensions

Vishay High Power Products

MTK
(with and without optional barrier)



DIMENSIONS WITHOUT OPTIONAL BARRIERS in millimeters (inches)

