


## Standard Recovery Diodes (Stud Version), 300 A

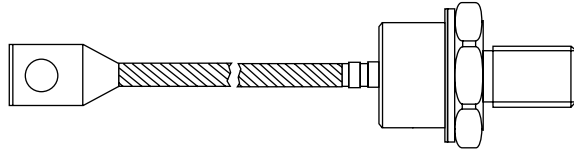

DO-205AB (DO-9)

**FEATURES**

- Alloy diode
- Popular series for rough service
- Stud cathode and stud anode version
- RoHS compliant
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

**TYPICAL APPLICATIONS**

- Welders
- Power supplies
- Motor controls
- Battery chargers
- General industrial current rectification

**PRODUCT SUMMARY**

$I_{F(AV)}$	300 A
-------------	-------

**MAJOR RATINGS AND CHARACTERISTICS**

PARAMETER	TEST CONDITIONS	VALUES	UNITS
$I_{F(AV)}$		300	A
	$T_C$	150	°C
$I_{FSM}$	50 Hz	6550	A
	60 Hz	6850	
$I^2t$	50 Hz	214	kA <sup>2</sup> s
	60 Hz	195	
$V_{RRM}$	Range	100 to 600	V
$T_J$		- 65 to 200	°C

**ELECTRICAL SPECIFICATIONS**
**VOLTAGE RATINGS**

TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ MAXIMUM AT $T_J = 175$ °C mA
300U(R)	10	100	200	40
	20	200	300	
	30	300	400	
	40	400	500	
	60	600	700	

# 300U(R) Series



Vishay High Power Products Standard Recovery Diodes  
(Stud Version), 300 A

FORWARD CONDUCTION					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave		300	A
				130	°C
Maximum peak, one cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10 ms	No voltage reapplied	6550	A
		t = 8.3 ms			
		t = 10 ms	100 % $V_{RRM}$ reapplied	5500	
		t = 8.3 ms			
Maximum $I^2t$ for fusing	$I^2t$	t = 10 ms	No voltage reapplied	214	kA <sup>2</sup> s
		t = 8.3 ms			
		t = 10 ms	100 % $V_{RRM}$ reapplied	195	
		t = 8.3 ms			
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reapplied		2140	kA <sup>2</sup> √s
Maximum value of threshold voltage	$V_{F(TO)}$	$T_J = 200\text{ °C}$		0.610	V
Maximum value of forward slope resistance	$r_f$			0.751	mΩ
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 942\text{ A}, T_J = 25\text{ °C}$		1.40	V

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum junction operating and storage temperature range	$T_J, T_{Stg}$			- 65 to 200	°C
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation		0.18	K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface, smooth, flat and greased		0.08	
Maximum allowed mounting torque + 0 - 20 %		Not lubricated threads		37	Nm
		Lubricated threads		28	
Approximate weight				250	g
Case style		(JEDEC) see dimensions - link at the end of datasheet		DO-205AB (DO-9) <sup>(1)</sup>	

**Note**

(1) 302U-A uses case style B-26


$\Delta R_{thJC}$ CONDUCTION				
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION	TEST CONDITIONS	UNITS
180°	0.020	0.015	$T_J = T_J$ maximum	K/W
120°	0.024	0.025		
90°	0.031	0.034		
60°	0.045	0.047		
30°	0.077	0.077		

**Note**

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC



## ORDERING INFORMATION TABLE

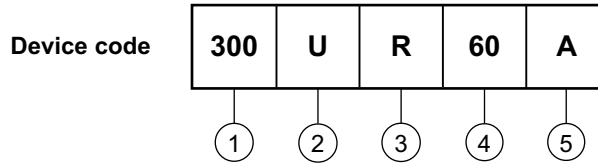


- 1** -
  - 300 = Standard 300U device
  - 302 = 300U top threaded version
- 2** - U = Essential part number
- 3** -
  - R = Stud reverse polarity (anode to stud)
  - None = Stud normal polarity (cathode to stud)
- 4** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)
- 5** - A = Essential part number

Note: For metric device M16 x 1.5 contact factory



## DO-205AB (DO-9) and B-26 for 300U(R) Series

### DIMENSIONS FOR 300U(R)-A SERIES - DO-205AB (DO-9) in millimeters (inches)

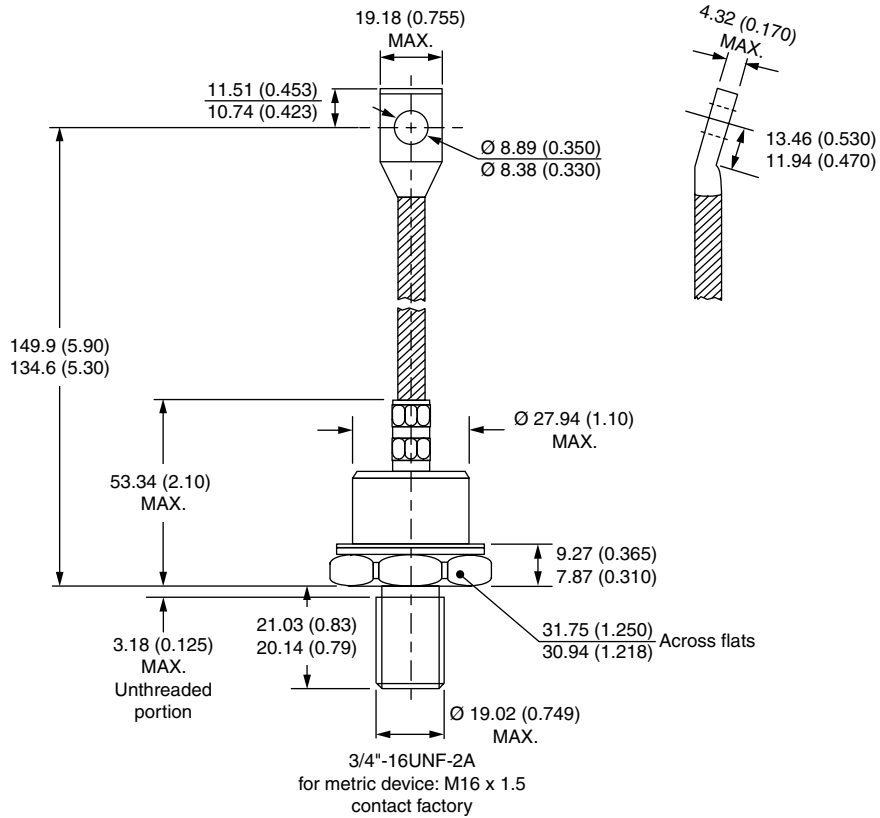

### DIMENSIONS FOR 302U(R)-A SERIES - B-26 in millimeters (inches)

