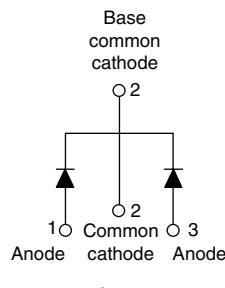
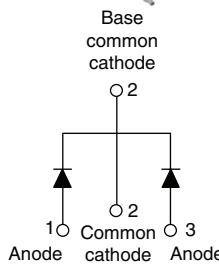


Schottky Rectifier, 2 x 10 A

MBRB20..CTPbF

D²PAK

MBR20..CT-1PbF


TO-262

FEATURES

- 150 °C T_J operation
- Low forward voltage drop
- High frequency operation
- Center tap D²PAK and TO-262 packages
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Lead (Pb)-free
- Designed and qualified for Q101 level


RoHS*
COMPLIANT

DESCRIPTION

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

PRODUCT SUMMARY

I _{F(AV)}	2 x 10 A
V _R	80 to 100 V

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNITS
I _{F(AV)}	Rectangular waveform (per device)	20	A
I _{FRM}	T _C = 133 °C (per leg)	20	
V _{RRM}		80 to 100	V
I _{FSM}	t _p = 5 µs sine	850	A
V _F	10 Apk, T _J = 125 °C	0.70	V
T _J	Range	- 65 to 150	°C

VOLTAGE RATINGS

PARAMETER	SYMBOL	MBRB2080CTPbF MBR2080CT-1PbF	MBRB2090CTPbF MBR2090CT-1PbF	MBRB20100CTPbF MBR20100CT-1PbF	UNITS
Maximum DC reverse voltage	V _R	80	90	100	V
Maximum working peak reverse voltage	V _{RWM}				

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum average forward current per leg	I _{F(AV)}	T _C = 133 °C, rated V _R	10	A
per device			20	
Peak repetitive forward current per leg	I _{FRM}	Rated V _R , square wave, 20 kHz, T _C = 133 °C	20	
Non-repetitive peak surge current	I _{FSM}	5 µs sine or 3 µs rect. pulse	850	A
		Following any rated load condition and with rated V _{RRM} applied	150	
Peak repetitive reverse surge current	I _{RRM}	Surge applied at rated load conditions halfwave, single phase, 60 Hz	0.5	
Non-repetitive avalanche energy per leg	E _{AS}	T _J = 25 °C, I _{AS} = 2 A, L = 12 mH	24	mJ

* Pb containing terminations are not RoHS compliant, exemptions may apply

ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum forward voltage drop	V _{FM} ⁽¹⁾	10 A	T _J = 25 °C	0.80	V	
		20 A		0.95		
		10 A	T _J = 125 °C	0.70		
		20 A		0.85		
Maximum instantaneous reverse current	I _{RM} ⁽¹⁾	T _J = 25 °C	Rated DC voltage	0.10	mA	
		T _J = 125 °C		6		
Threshold voltage	V _{F(TO)}	T _J = T _J maximum		0.433	V	
Forward slope resistance	r _f			15.8	mΩ	
Maximum junction capacitance	C _T	V _R = 5 V _{DC} (test signal range 100 kHz to 1 MHz) 25 °C		400	pF	
Typical series inductance	L _S	Measured from top of terminal to mounting plane		8.0	nH	
Maximum voltage rate of change	dV/dt	Rated V _R		10 000	V/μs	

Note

(1) Pulse width < 300 μs, duty cycle < 2 %

THERMAL - MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Maximum junction temperature range	T _J		- 65 to 150	°C	
Maximum storage temperature range	T _{Stg}		- 65 to 175		
Maximum thermal resistance, junction to case per leg	R _{thJC}	DC operation	2.0	°C/W	
Typical thermal resistance, case to heatsink	R _{thCS}		0.50		
Maximum thermal resistance, junction to ambient	R _{thJA}	DC operation	50		
Approximate weight			2	g	
Mounting torque	minimum	Non-lubricated threads	0.07	oz.	
	maximum		6 (5)	kgf · cm (lbf · in)	
Marking device		Case style D ² PAK	MBRB20100CT		
		Case style TO-262	MBR20100CT-1		



MBRB2080/90/100CTPbF, MBR2080/90/100CT-1PbF

Schottky Rectifier,
2 x 10 A

Vishay High Power Products

ORDERING INFORMATION TABLE


Device code	MBR	B	20	100	CT	-1	TRL	P
	1	2	3	4	5	6	7	8

- [1]** - Essential part number
[2] - • B = D²PAK **[6]** None
 • None = TO-262 **[6]** = -1
[3] - Current rating (20 = 20 A) 80 = 80 V
[4] - Voltage ratings 90 = 90 V
 100 = 100 V
[5] - CT = Essential part number
[6] • None = D²PAK **[2]** = B
 • -1 = TO-262 **[2]** None
[7] - • None = Tube (50 pieces)
 • TRL = Tape and reel (left oriented - for D²PAK only)
 • TRR = Tape and reel (right oriented - for D²PAK only)
[8] - • None = Standard production
 • PbF = Lead (Pb)-free (for TO-262 and D²PAK tube)
 • P = Lead (Pb)-free (for D²PAK TRR and TRL)

D²PAK, TO-262

DIMENSIONS FOR D²PAK in millimeters and inches

Conforms to JEDEC outline D²PAK (SMD-220)

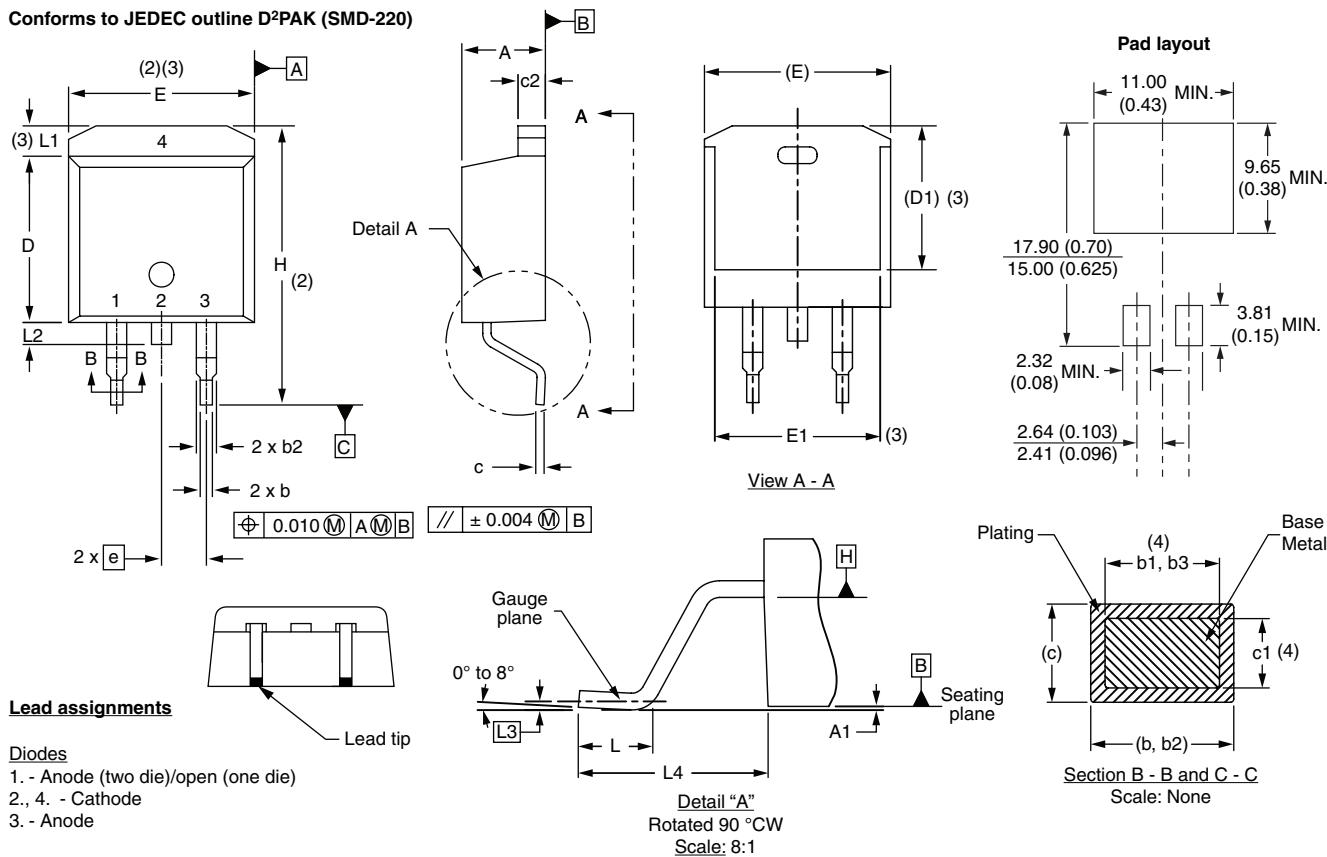

SYMBOL	MILLIMETERS		INCHES		NOTES		SYMBOL	MILLIMETERS		INCHES		NOTES
	MIN.	MAX.	MIN.	MAX.				MIN.	MAX.	MIN.	MAX.	
A	4.06	4.83	0.160	0.190			D1	6.86	-	0.270	-	3
A1	0.00	0.254	0.000	0.010			E	9.65	10.67	0.380	0.420	2, 3
b	0.51	0.99	0.020	0.039			E1	6.22	-	0.245	-	3
b1	0.51	0.89	0.020	0.035	4		e	2.54 BSC		0.100 BSC		
b2	1.14	1.78	0.045	0.070			H	14.61	15.88	0.575	0.625	
b3	1.14	1.73	0.045	0.068	4		L	1.78	2.79	0.070	0.110	
c	0.38	0.74	0.015	0.029			L1	-	1.65	-	0.066	3
c1	0.38	0.58	0.015	0.023	4		L2	1.27	1.78	0.050	0.070	
c2	1.14	1.65	0.045	0.065			L3	0.25 BSC		0.010 BSC		
D	8.51	9.65	0.335	0.380	2		L4	4.78	5.28	0.188	0.208	

Notes

- (1) Dimensioning and tolerancing per ASME Y14.5 M-1994
- (2) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outmost extremes of the plastic body
- (3) Thermal pad contour optional within dimension E, L1, D1 and E1
- (4) Dimension b1 and c1 apply to base metal only
- (5) Datum A and B to be determined at datum plane H
- (6) Controlling dimension: inch
- (7) Outline conforms to JEDEC outline TO-263AB

Outline Dimensions


Vishay High Power Products

D²PAK, TO-262





DIMENSIONS FOR TO-262 in millimeters and inches


Modified JEDEC outline TO-262

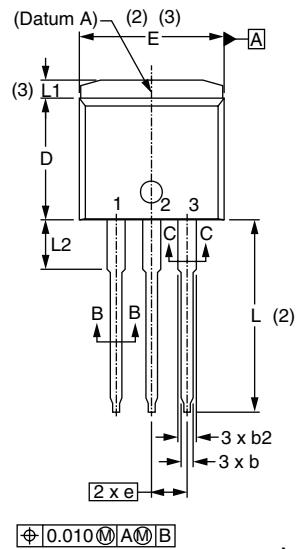

$\pm 0.010 \text{ mm}$

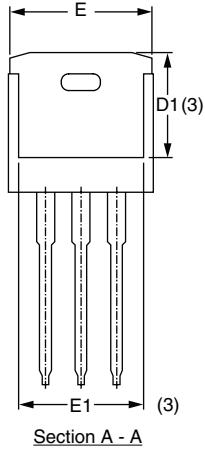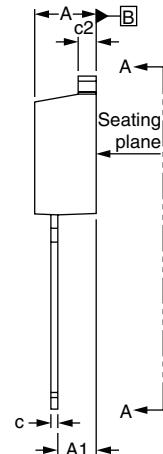


Section A - A



Lead assignments

Diodes

- 1. - Anode (two die)/open (one die)
- 2., 4. - Cathode
- 3. - Anode

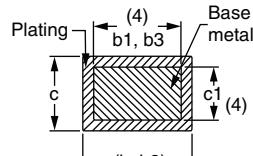

Section B - B and C - C

Scale: None

SYMBOL	MILLIMETERS		INCHES		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	4.06	4.83	0.160	0.190	
A1	2.03	3.02	0.080	0.119	
b	0.51	0.99	0.020	0.039	
b1	0.51	0.89	0.020	0.035	4
b2	1.14	1.78	0.045	0.070	
b3	1.14	1.73	0.045	0.068	4
c	0.38	0.74	0.015	0.029	
c1	0.38	0.58	0.015	0.023	4
c2	1.14	1.65	0.045	0.065	
D	8.51	9.65	0.335	0.380	2
D1	6.86	-	0.270	-	3
E	9.65	10.67	0.380	0.420	2, 3
E1	6.22	-	0.245	-	3
e	2.54 BSC		0.100 BSC		
L	13.46	14.10	0.530	0.555	
L1	-	1.65	-	0.065	3
L2	3.56	3.71	0.140	0.146	

Notes

- (1) Dimensioning and tolerancing as per ASME Y14.5M-1994
- (2) Dimension D and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outmost extremes of the plastic body
- (3) Thermal pad contour optional within dimension E, L1, D1 and E1
- (4) Dimension b1 and c1 apply to base metal only
- (5) Controlling dimension: inches

- (6) Outline conform to JEDEC TO-262 except A1 (maximum), b (minimum) and D1 (minimum) where dimensions derived the actual package outline