


VOLEX


GROUP

Standard Cord Details: 17660 10 C3




Specifications	
Certifications	
Part Number	17660 10 C3
Connector Type	C13
Plug Type	5-15P
Category	Plastic
Application	Detachable
Plug Catalog No.	PS204
Connector Catalog No.	386A
Cable	SVT AWG 18x3 (Foil Shielded Plus 85% Braid)
Jacket Color	Black
Length in Feet	6'7"
Length in Meters	2
Temperature Rating	60 C
Packaging Units Per Carton	H-25
Color Coding	International
Nominal OD in Inches	0.307
Nominal OD in Millimeters	7.8

 [BACK](#)

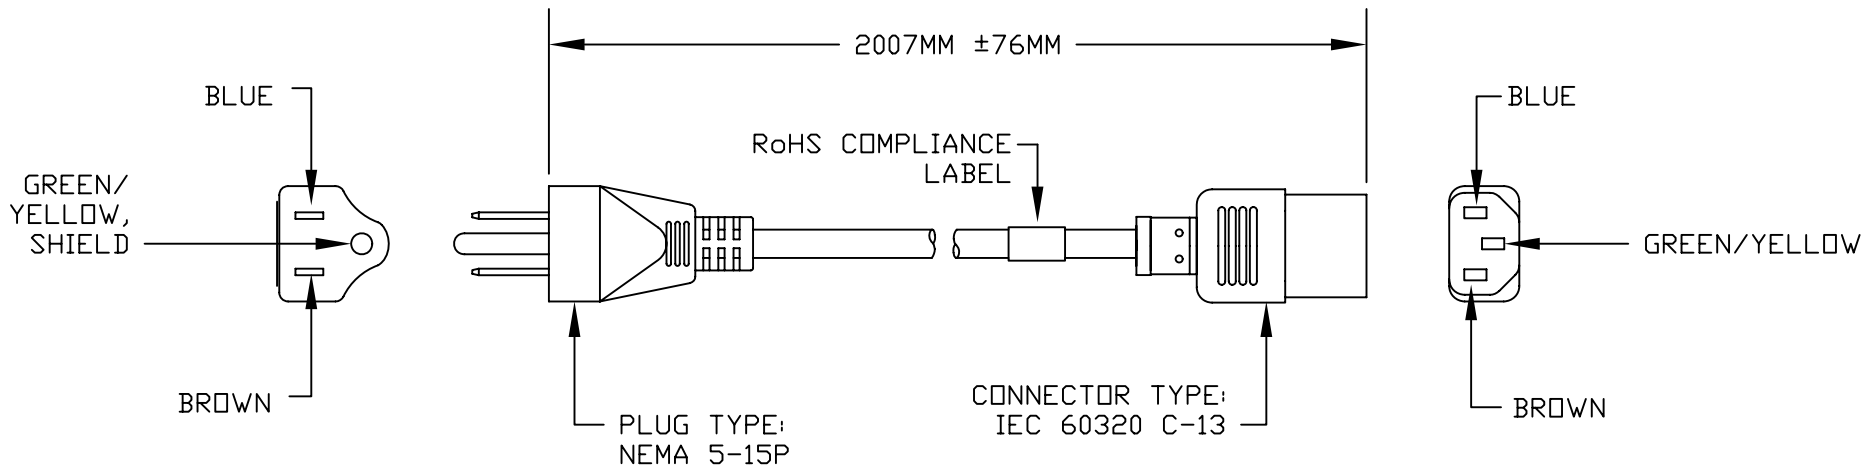

VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: FOLDED & TIED

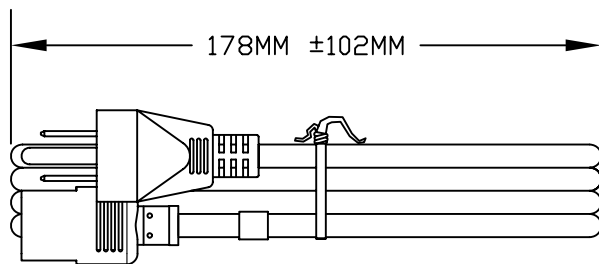

NOTES:

- 1) CORDAGE: 18/3 SVT, 60°C, BLACK, BRAID SHIELDED
- 2) APPROVALS:
- 3) RATING: 10 AMP/125 VOLTS
- 4) FLAME RATING : FT2
- 5) SHIELD WILL BE ATTACHED TO GROUND PIN ON PLUG END OF CORD. NO SHIELD CONNECTION WILL BE MADE ON CONNECTOR END.
- 6) ALL DIMENSIONS IN MILLIMETERS.
- 7) PACKAGING: 25 PIECES/CARTON.

3		
2		
1	C.U.D - NEW RELEASE	8/8/07
REV	DESCRIPTION	DATE



FORM IN71-07 REV.A

- Indianapolis, IN
- Conover, N.C.
- Freemont, CA
- Aguascalientes, MX
- Tijuana, Mexico
- Hermosillo, MX
- Clinton, AR
- Kanata, Canada

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

MATERIAL:
PLUG: PVC, BLACK
JACKET: PVC, BLACK
RoHs/Prop 65 Compliant

FINISH:
JACKET: SMOOTH

SCALE:
NOT TO SCALE

ECD:
N/A

ITEM DESCRIPTION
CORDSET-NORTH AMERICAN, BRAID SHIELDED, DETACHABLE POWER SUPPLY CORD (6'7")

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ± .005
.XX ± .02
.X ± .03
FRACT. ± 1/32
ANGULAR ± 1/2°

APPROVED: STC
DRAWN BY: STC
DATE: 8/8/07

PART NO. 17660 10 C3