



INLET: IEC60320 C-20
ACCEPTS V-LOCK TAB

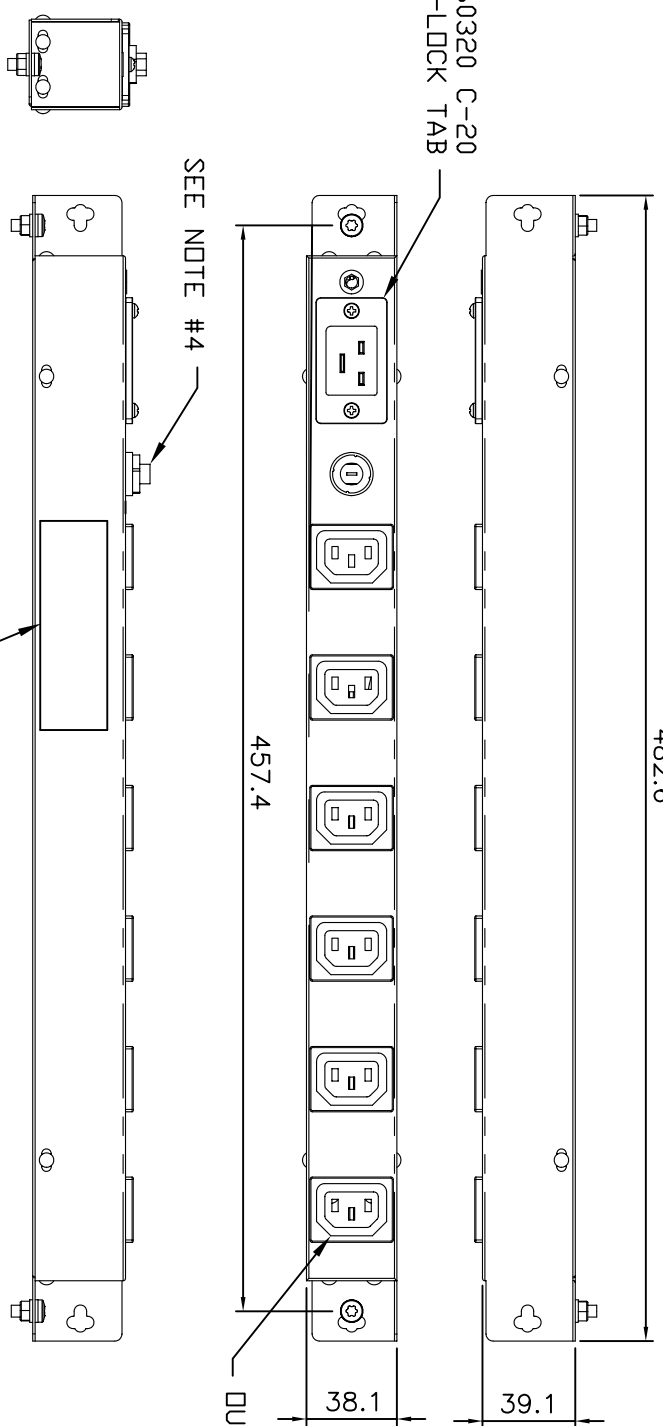

482.6
457.4
39.1
38.1
DUTLETS: IEC60320 C-13
ACCEPTS V-LOCK
TAB (6 PLACES)

- NOTES
- 1) RATING: TOTAL UNIT = 16AMPS @ 240VDLTS MAX.
INDIVIDUAL DUTLETS= 10AMPS @ 240VDLTS MAX.
 - 2) APPROVALS: UL / cUL
 - 3) PACKAGING: 20 PIECES PER CARTON
 - 4) 16AMP CIRCUIT BREAKER

VOLEX RESERVES THE RIGHT TO
ALTER NON-CRITICAL DIMENSIONS
WITHOUT NOTICE.

 CUD <small>FORM IN71-07 REV.A</small>	<input checked="" type="checkbox"/> Indianapolis, IN <input type="checkbox"/> Conover, N.C. <input type="checkbox"/> Freemont, CA <input type="checkbox"/> Aguascalientes, MX <input type="checkbox"/> Tijuana, Mexico <input type="checkbox"/> Hermosillo, MX <input type="checkbox"/> Clinton, AR <input type="checkbox"/> Kanata, Canada		Proprietary Notice: This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.		MATERIAL: PLUG: PVC-BLACK CONNECTOR: PVC-BLACK JACKET: PVC-BLACK		FINISH: JACKET: SMOOTH		TOLERANCE UNLESS OTHERWISE SPECIFIED .XXX ± .005 .XX ± .02 .X ± .03 ANGLUAR ± 1/2°		ITEM DESCRIPTION V-LOCK POWER DISTRIBUTION UNIT	
	1 REV		ECD: N/A		SCALE: NDT TO SCALE		APPROVED MAF		DRAWN BY STC		DATE: 6/22/07	
C.U.D - NEW RELEASE		DESCRIPTION		DATE		PART NO. VL-5036-1-24-6						