


147 Central Avenue
 Hackensack, New Jersey 07601
 Tel: 201-489-8989 • Fax: 201-489-6911




CHICAGO MINIATURE LAMP, INC.
 WHERE INNOVATION COMES TO LIGHT

G-3 1/2 Miniature 2 Pin Base

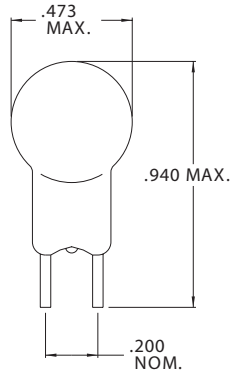

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM10 | 2.5 | .50 | .50 | 3,000 | C-6 |
| CM12 | 6.3 | .15 | .35 | 5,000 | C-6 |
| CM25 | 6.3 | .25 | .50 | 5,000 | C-6 |
| CM612 | 6.3 | .25 | .65 | 5,000 | C-6 |
| CM29 | 10.0 | .11 | .65 | 3,000 | C-2R |
| CM19 | 14.4 | .10 | .90 | 1,000 | C-6 |

G-3 1/2 Miniature Screw Base

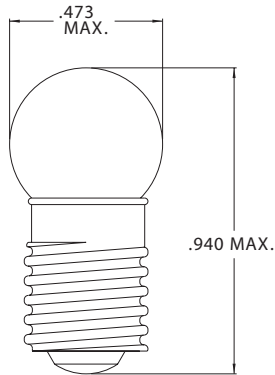

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM123 | 1.25 | .300 | .10 | 10 | S-2 |
| CM1439 | 1.25 | .600 | .20 | 75 | S-2 |
| CM131 | 1.30 | .100 | .03 | 50 | S-2 |
| CM359 | 1.35 | .060 | .02 | 50 | S-2 |
| CM1532 | 1.35 | .220 | .09 | 30 | S-2 |
| CM217 | 1.50 | .435 | .25 | 12 | S-2 |
| CM458 | 1.50 | .200 | .12 | 30 | S-2 |
| CM196 | 1.90 | .600 | .70 | 10 | C-2R |
| CM138 | 2.00 | .500 | .70 | 15 | C-2R |
| CM100 | 2.10 | .500 | .70 | 15 | C-2R |
| CM233 | 2.33 | .270 | .42 | 10 | C-2R |
| CM263 | 2.40 | .350 | .52 | 45 | C-2R |
| CM245 | 2.46 | .500 | .90 | 15 | C-2R |
| CM14 | 2.47 | .300 | .50 | 15 | C-2R |
| CM352 | 3.00 | .070 | .15 | 50 | S-2 |
| CM365 | 3.69 | .500 | 1.6 | 15 | C-2R |
| CM13 | 3.70 | .300 | .98 | 15 | C-2R |
| CM1438 | 3.80 | .430 | 1.6 | 1 | C-2R |
| CM133 | 6.30 | .150 | .32 | 2,000 | C-2R |
| CM134 | 6.30 | .250 | .55 | 2,000 | C-2R |
| CM50 | 7.50 | .220 | 1.0 | 1,000 | C-2R |
| CM1446 | 12.0 | .200 | 1.7 | 250 | C-2V |
| CM1449 | 14.0 | .200 | 2.0 | 250 | C-2V |
| CM52 | 14.40 | .100 | .75 | 1,000 | C-2V |
| CM1447 | 18.0 | .150 | 1.5 | 250 | C-2V |

Chicago Miniature Lamp reserves the right to make specification revisions that enhance the design and/or performance of the product