

Chronos 2 Plug-In Timers

Crouzet Products /Automation Controls /Electronic Timers /8 & 11 Pin Chronos 2 Timers


PRODUCT FEATURES

- ✚ Multi-function or mono-function
- ✚ Multi-range (7 ranges, available options)
- ✚ Multi-voltage
- ✚ SPDT or DPDT relay output: 10 A - 250 V
- ✚ 8 and 11 Plug-in
- ✚ LED status indicator
- ✚ 3-wire sensor control option
- ✚ cUL, UL listed, CSA recognized, CE Approved



8-Pin Plug-In Timers

Type	Function	Connection	Supply Voltage	Nominal Rating	Part number	
OL2R1	L (Repeat Cycle)	8-Pin Plug-In	24VDC, 24-240VAC	8A SPDT	88867801	Check Stock
OUR1	Multifunction	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867105	Check Stock
OA2R1	A (Delay-on-Make)	8-Pin Plug-In	24VDC, 24-240VAC	10A DPDT	88867215	Check Stock
OCR1	C (Delay-on-Break)	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867135	Check Stock
OLR1	Li,L (Repeat Cycle)	8-Pin Plug-In	24VDC, 24-240VAC	10A SPDT	88867155	Check Stock
OUR4	Multifunction	8-Pin Plug-In	12VAC/DC	10A SPDT	88867100	Check Stock
OUR3	Multifunction	8-Pin Plug-In	12-240VAC/DC	10A SPDT	88867103	Check Stock

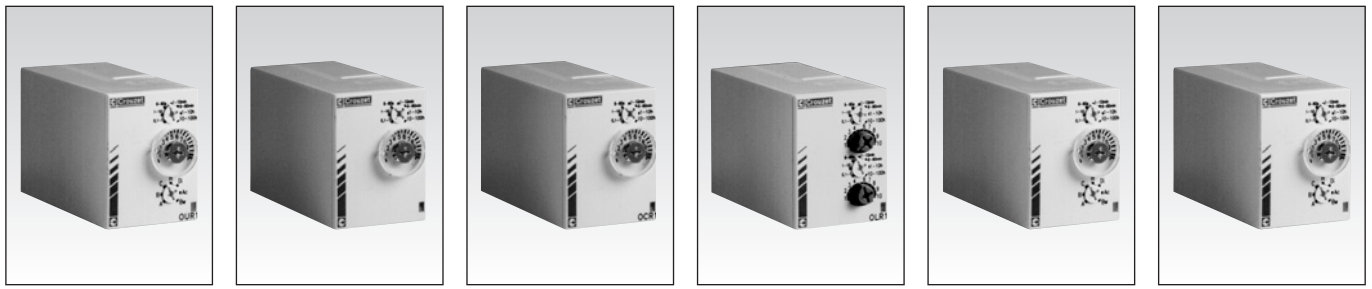

0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
OUR1	OA2R1	OCR1	OLR1	OUR4	OUR3
88 867 105	88 867 215	88 867 135	88 867 155	—	—
—	—	—	—	88 867 100	—
Multi-function	Mono-function	Mono-function	Bifunction	Multi-function	Multi-function
A - At - B - C - H - Ht - Di - D - Ac - Bw	A	C	Li - L	A - At - B - C - H - Ht - Di - D - Ac - Bw	A - At - B - C - H - Ht - Di - D - Ac - Bw
10 A	10 A	10 A	10 A	10 A	10 A
1 relay	2 relays	1 relay	1 relay	1 relay	1 relay


Function diagrams

Function A

Delay on Make
1 relay



2 relays



Function At

Accumulative Delay on Make
1 relay




Function B

Single Shot
1 relay




Function C

Delay on Break
1 relay




Function H

Interval
1 relay



Function Ht

Accumulative Interval
1 relay



Function L

Repeat Cycle. Off Time First
Pause start




Function Li

Repeat Cycle. On Time First
Pulse start




Function D

Repeat Cycle. Equal On/Off Time.
Off Time First.
Pause start




Function Di

Repeat Cycle. Equal On/Off Time.
On Time First.
Pulse start




Function Ac

Combo Delay on Make/Delay on Break. Equal On/Off Time.
1 relay




Function Bw

Pulse output (adjustable)
1 relay





Connections: 8-pin 1 relay




8-pin 2 relay


(Y1 = C, Function diagrams)




Dimensions

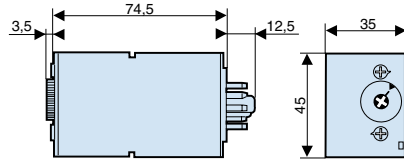

Accessories

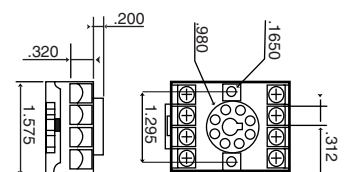

Functions:
A - At / H - Ht / B / C
Di - D / Ac / Bw



A

8-pin connector base
S08

To order, specify:

1 Type

2 Part number

3 Part number

Example: Chronos 2 Timers OUR1 88 867 105

8-pin connector base S08