

Chronos 2 Plug-In Timers

Crouzet Products /Automation Controls /Electronic Timers /8 & 11 Pin Chronos 2 Timers


PRODUCT FEATURES

- + Multi-function or mono-function
- + Multi-range (7 ranges, available options)
- + Multi-voltage
- + SPDT or DPDT relay output: 10 A - 250 V
- + 8 and 11 Plug-in
- + LED status indicator
- + 3-wire sensor control option
- + cUL, UL listed, CSA recognized, CE Approved



8-Pin Plug-In Timers

| Type | Function | Connection | Supply Voltage | Nominal Rating | Part number | |
|-------|----------------------|---------------|------------------|----------------|--------------------------|-----------------------------|
| OL2R1 | L (Repeat Cycle) | 8-Pin Plug-In | 24VDC, 24-240VAC | 8A SPDT | 88867801 | Check Stock |
| OUR1 | Multifunction | 8-Pin Plug-In | 24VDC, 24-240VAC | 10A SPDT | 88867105 | Check Stock |
| OA2R1 | A (Delay-on-Make) | 8-Pin Plug-In | 24VDC, 24-240VAC | 10A DPDT | 88867215 | Check Stock |
| OCR1 | C (Delay-on-Break) | 8-Pin Plug-In | 24VDC, 24-240VAC | 10A SPDT | 88867135 | Check Stock |
| OLR1 | Li,L (Repeat Cycle) | 8-Pin Plug-In | 24VDC, 24-240VAC | 10A SPDT | 88867155 | Check Stock |
| OUR4 | Multifunction | 8-Pin Plug-In | 12VAC/DC | 10A SPDT | 88867100 | Check Stock |
| OUR3 | Multifunction | 8-Pin Plug-In | 12-240VAC/DC | 10A SPDT | 88867103 | Check Stock |

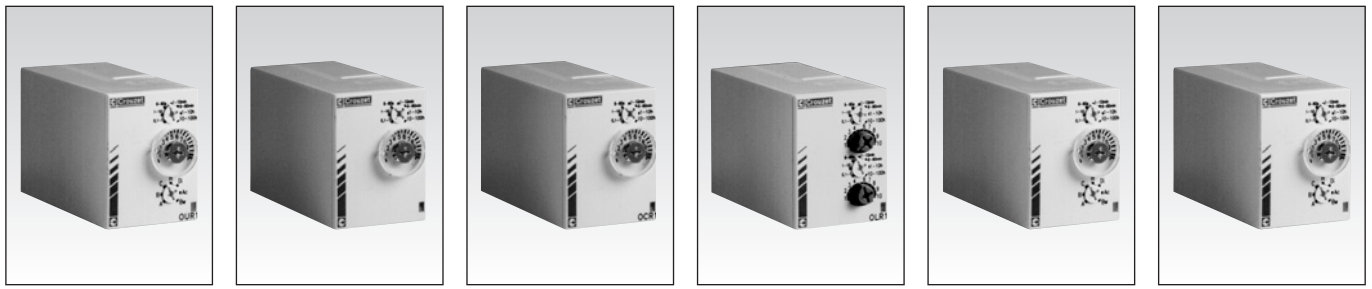

| | | | | | |
|--|-------------------|-------------------|-------------------|--|--|
| 0.1s • 100h | 0.1s • 100h | 0.1s • 100h | 0.1s • 100h | 0.1s • 100h | 0.1s • 100h |
| OUR1 | OA2R1 | OCR1 | OLR1 | OUR4 | OUR3 |
| 88 867 105 | 88 867 215 | 88 867 135 | 88 867 155 | — | — |
| — | — | — | — | 88 867 100 | — |
| Multi-function | Mono-function | Mono-function | Bifunction | Multi-function | Multi-function |
| A - At - B - C - H - Ht - Di - D - Ac - Bw | A | C | Li - L | A - At - B - C - H - Ht - Di - D - Ac - Bw | A - At - B - C - H - Ht - Di - D - Ac - Bw |
| 10 A | 10 A | 10 A | 10 A | 10 A | 10 A |
| 1 relay | 2 relays | 1 relay | 1 relay | 1 relay | 1 relay |

Function diagrams

Function A

Delay on Make
1 relay



2 relays



Function At

Accumulative Delay on Make
1 relay




Function B

Single Shot
1 relay




Function C

Delay on Break
1 relay




Function H

Interval
1 relay



Function Ht

Accumulative Interval
1 relay



Function L

Repeat Cycle. Off Time First
Pause start




Function Li

Repeat Cycle. On Time First
Pulse start




Function D

Repeat Cycle. Equal On/Off Time.
Off Time First.
Pause start



Function Di

Repeat Cycle. Equal On/Off Time.
On Time First.
Pulse start



Function Ac

Combo Delay on Make/Delay on Break. Equal On/Off Time.
1 relay





Function Bw

Pulse output (adjustable)
1 relay




Connections: 8-pin 1 relay


(Y1 = C, Function diagrams)




8-pin 2 relay




Dimensions

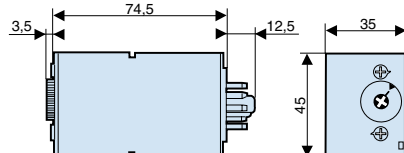

Accessories

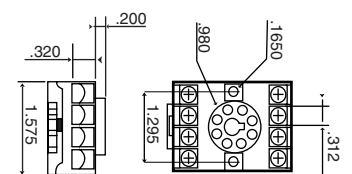

Functions:
A - At / H - Ht / B / C
Di - D / Ac / BW



A

To order, specify:

1 Type

Example: Chronos 2 Timers OUR1 88 867 105

2 Part number

3 Part number

8-pin connector base S08