

Maxim > Products > [Supervisors, Voltage Monitors, Sequencers]

DS12335V EconoReset

Description

The DS1233 EconoReset monitors two vital conditions for a microprocessor: power supply and external override. A precision temperature-compensated reference and comparator circuit are used to monitor the status of the power supply (V_{CC}) . When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350ms to allow the power supply and processor to stabilize. The second function of the DS1233 is pushbutton reset control. The DS1233 debounces a pushbutton closure and will generate a 350ms reset pulse upon release.

Key Features

- Automatically restarts microprocessor after power failure
- Monitors pushbutton for external override
- Internal circuitry debounces pushbutton switch
- \bullet Maintains reset for 350ms after V_{CC} returns to an in-tolerance condition or pushbutton released
- Accurate 5%, 10%, or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface-mount SOT-223 package
- Internal 5kΩpull-up resistor
- Operating temperature of -40°C to +85°C

		Key Specifications: Supervisors (1 Monitored Voltage)						
Part Nilmber	shold Range Active-Low Reserv) Output	Min. Reset Timeout Range	Watchdog Feature	Supervisor Features	Reset Thresh. Acc. (% @+25°C)	Max. I _{CC} (μA)		

DS1233	3.3 to 5.5	Open Drain with Internal Pull-Up	250ms to 450ms	No Watchdog	Manual Reset	2.5	50		
	See All Supervisors (1 Monitored Voltage) (268)								

Notes:

Application Notes

Application Note 51: How to Save Data During a Power Fail without Corrupting It - DS1233 Application Note 3316: Dallas Semiconductor Microprocessor Supervisor Selection Guide - DS1233

Evaluation Kits

none

Design Guides

Microprocessor Supervisory (PDF)

Reliability Reports

Reliability Report: DS1233.

pdf

Software/Models

none

Ordering Information

Notes:

- 1. Other options and links for purchasing parts are listed at:
- 2. Didn't Find What You Need? Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
- 3. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: SeeFull Data Sheet or Part Naming Conventions.
- 4. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses. Note that "+", "#", "-" in the part number suffix describes RoHS status. Package drawings may show a different suffix character.

^{**}This pricing is BUDGETARY, for comparing similar parts. Prices are in U.S. dollars and subject to change. Quantity pricing may vary substantially and international prices may differ due to local duties, taxes, fees, and exchange rates. For volume-specific prices and delivery, please see the price and availability page or contact an authorized distributor.

Devices: 1-26 of 26

DS1233	Notes	Free Sample	Buy	Package: TYPE PINS FOOTPRINT DRAWING CODE/VAR	Temp	RoHS/Lead-Free? Materials Analysis
DS1233Y-10/T&R+C05				ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233Z-10+T&R	5V-10% 2500/Reel			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233Z-15	5V-15% Monitor			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233 Z -10	5V-10% Monitor			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-5	5V-5% Monitor			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-15/T&R	5V-15% 2500/Reel			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-10/T&R	5V-10% 2500/Reel			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-15+T&R	5V-15% 2500/Reel			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233Z-5/T&R	5V-5%, 2500/Reel			ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233Z-10+				ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233Z-5+				ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis

DS1233Z-15+		ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233Z-5+T&R	5V-5% 2500/Reel	ST223;3 pin; Dwg: 21-0264 (PDF) Use pkgcode/variation: K3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-15/T&R/STR		TO92;3 pin; Dwg: 21-0248 (PDF) Use pkgcode/variation: Q3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233-10+		TO92;3 pin; Dwg: 21-0248 (PDF) Use pkgcode/variation: Q3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-10+T&R	5V-10% 2000/Reel	TO92;3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3+4*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-5+T&R	5V-5% 2000/Reel	TO92;3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3+4*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-5+	5V-5%	TO92;3 pin; Dwg: 21-0248 (PDF) Use pkgcode/variation: Q3+1*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-15+T&R	5V-15% 2000/Reel	TO92;3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3+4*	-40°C to +85° C	RoHS/Lead-Free: Lead Free Materials Analysis
DS1233-15/T&R	5V-15% 2000/Reel	TO92;3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3-4*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233-10/T&R	5V-10%, 2000/Reel	TO92; 3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3-4*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233-5/T&R	5V-5% 2000/Reel	TO92; 3 pin; Dwg: 21-0250 (PDF) Use pkgcode/variation: Q3-4*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233-15	5V-15% Monitor	TO92;3 pin; Dwg: 21-0248 (PDF) Use pkgcode/variation: Q3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis
DS1233-10	5V-10%	TO92; 3 pin; Dwg: 21-0248 (PDF) Use pkgcode/variation: Q3-1*	-40°C to +85° C	RoHS/Lead-Free: No Materials Analysis




DS1233 5V EconoReset

FEATURES


- Automatically restarts microprocessor after power failure
- Monitors pushbutton for external override
- Internal circuitry debounces pushbutton switch
- Maintains reset for 350ms after V_{CC} returns to an in-tolerance condition or pushbutton released
- Accurate 5%, 10%, or 15% microprocessor
 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface-mount SOT-223 package
- Internal $5k\Omega$ pull-up resistor
- Operating temperature of -40°C to +85°C

PIN ASSIGNMENT





on Website



PIN DESCRIPTION

 $\begin{array}{ll} \text{PIN 1} & \quad & \quad & \quad & \quad & \quad \\ \text{PIN 2} & \quad & \quad & \quad & \quad \\ \text{PIN 3} & \quad & \quad & \quad & \quad & \quad \\ \end{array}$

PIN 4 GROUND (SOT-223 ONLY)

DESCRIPTION

The DS1233 EconoReset monitors two vital conditions for a microprocessor: power supply and external override. A precision temperature-compensated reference and comparator circuit are used to monitor the status of the power supply (V_{CC}). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350ms to allow the power supply and processor to stabilize. The second function of the DS1233 is pushbutton reset control. The DS1233 debounces a pushbutton closure and will generate a 350ms reset pulse upon release.

OPERATION — POWER MONITOR

The DS1233 provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When V_{CC} is detected as out-of-tolerance, as defined by the tolerance of the part selected, the \overline{RST} signal is asserted. On power-up, \overline{RST} is kept active for approximately 350ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before \overline{RST} is released.

1 of 5 122001

ABSOLUTE MAXIMUM RATINGS*

 $\begin{array}{lll} \mbox{Voltage on V_{CC} Pin Relative to Ground} & -0.5 \mbox{V to } +7.0 \mbox{V} \\ \mbox{Voltage on I/O Relative to Ground} & -0.5 \mbox{V to V_{CC}} +0.5 \mbox{V} \\ \mbox{Operating Temperature Range} & -40 \mbox{°C to } +85 \mbox{°C} \\ \mbox{Storage Temperature Range} & -55 \mbox{°C to } +125 \mbox{°C} \\ \mbox{Soldering Temperature} & 260 \mbox{°C for } 10 \mbox{ seconds} \\ \end{array}$

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS

 $(-40^{\circ}C \text{ to } +85^{\circ}C)$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	V_{CC}	1.2	5.0	5.5	V	1

DC ELECTRICAL CHARACTERISTICS

 $(-40^{\circ}\text{C to } +85^{\circ}\text{C}; V_{DD} = 5\text{V} \pm 10\%)$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Low Level @ RST	V_{OL}			0.4	V	1
Output Current @ 0.4V	I_{OL}	+8			mA	
Operating Current	I_{CC}			50	μΑ	
V _{CC} Trip Point 5%	V _{CCTP0}	4.50	4.625	4.75	V	1
V _{CC} Trip Point 10%	V _{CCTP1}	4.25	4.375	4.49	V	1
V _{CC} Trip Point 15%	V _{CCTP2}	4.0	4.125	4.24	V	1
Output Capacitance	C _{OUT}			10	pF	
Pushbutton Detect	PB_{DV}	1.8		3.3	V	1
Pushbutton Release	PB_{RD}		0.3	0.8	V	1, 2
Internal Pull-Up Resistor	R_P	3.75	5	6.25	kΩ	

AC ELECTRICAL CHARACTERISTICS

 $(-40^{\circ}\text{C to } +85^{\circ}\text{C}; V_{\text{CC}} = 5\text{V} \pm 10\%)$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
RESET Active Time	t_{RST}	250	350	450	ms	
V _{CC} Detect to RST	$t_{ m RPD}$			100	ns	
V _{CC} Slew Rate (4.75V - 4.00V)	t_{F}	300			μs	
V _{CC} Slew Rate (4.00V - 4.75V)	t_{R}	0			ns	
Pushbutton Debounce	PB_{DB}	250	350	450	ms	
V _{CC} Detect to RST	$t_{ m RPU}$	250	350	450	ms	


NOTES:

- 1) All voltages are referenced to ground.
- 2) With a 100pF to $0.01\mu F$ capacitor connected from \overline{RST} to ground.


ECONORESET SELECTION GUIDE


		$\mathbf{V}_{\mathbf{C}}$	_C TRIP PO	INT	PUSHE	BUTTON E	DETECT
		MIN	TYP	MAX	MIN	TYP	MAX
	DS1233-15	4.0	4.125	4.24	1.8	-	3.3
	DS1233-10	4.25	4.375	4.49	1.8	-	3.3
	DS1233-5	4.5	4.625	4.75	1.8	-	3.3
	DS1233D-15	4.0	4.125	4.24	N/A		N/A
5V	DS1233D-10	4.25	4.375	4.49	N/A		N/A
	DS1233D-5	4.5	4.625	4.75	N/A		N/A
	DS1833-15	4.0	4.125	4.24	N/A		N/A
	DS1833-10	4.25	4.375	4.49	N/A		N/A
	DS1833-5	4.5	4.625	4.75	N/A		N/A
2 21/	DS1233A-15	2.64	2.72	2.80	0.8	-	2.0
3.3V	DS1233A-10	2.8	2.88	2.97	0.8	-	2.0

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
Α			

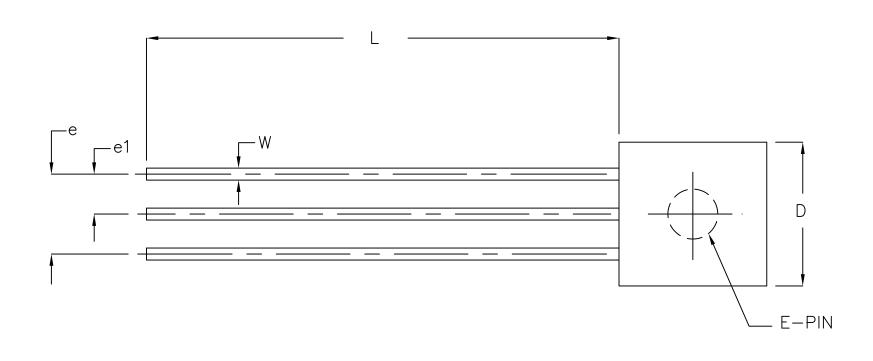

SYMBOL	INCH	HES	MILLIM	ETERS
	MIN	MAX	MIN	MAX
Α	.170	.195	4.32	4.95
b	.014	.020	0.36	0.51
E	.130	.155	3.30	3.94
е	.095	.105	2.41	2.67
e1	.045	.055	1.14	1.40
L	.500	.610	12.70	15.49
R	.085	.095	2.16	2.41
S1	.045	.060	1.14	1.52
W	.016	.022	0.41	0.56
D	.175	.195	4.45	4.95
α	4°	6°	· 4°	6°

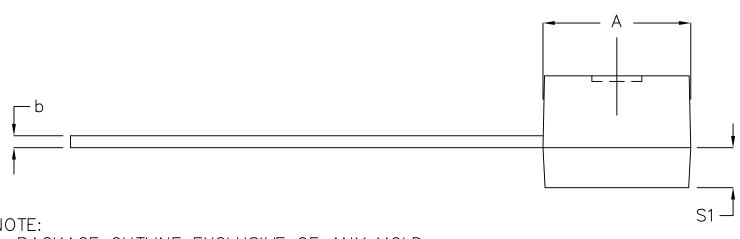


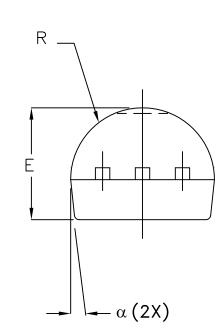



- NOTE:
- 1. PACKAGE OUTLINE EXCLUSIVE OF ANY MOLD FLASHES DIMENSION.
- 2. PACKAGE OUTLINE EXCLUSIVE OF BURR DIMENSION.
- 3. CONTROLLED DIMENSION IS INCH.
- 4. MEETS JEDEC TO-226 AA.

SIGNATURE	DATE	48 48			
ASSY ENGR:					
PROD. ENGR:					
DES. ENGR:		MARKETING	OUTLINE, T	0-92, 3-F	'nΝ
CHECK BY: TWM	12/01	SIZE FSCM NO	DWG NO		REV
DRAWN BY: JFD	12/01	D	2	21-0248	Α
		SCALE N/A		SHEET 1 OF 1	

	REVISIONS		·
LTR	DESCRIPTION	DATE	APPROVED
Α			

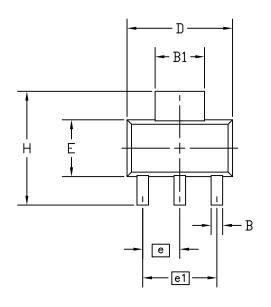

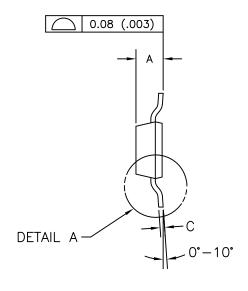



DETAIL A

DIM	MIN	MAX						
A IN. MM	1 1	-	.071 1.80					
B IN.	.024	.029	.035					
MM	0.60	0.74	0.88					
B1 IN.	.114	.120	.125					
MM	2.90	3.04	3.18					
C IN.	.009	.016						
MM	0.24	0.40						
D IN.	.248	.256	.264					
MM	6.30	6.50	6.70					
E IN. MM	.130 3.30							
e IN.	.091 BSC							
MM	2.30 BSC							
e1 IN.	.181 BSC							
MM	4.60 BSC							
H IN.	.264	.276	.287					
	6.70	7.00	7.30					
L IN. MM	.036 0.91	1 1	-					
L2 IN.	.0024 BSC							
MM	0.06 BSC							

SIGNATURE	DATE								
DOC. CONTROL:									
ENGR. MGR:		TITLE		MARKF	TING OUTLINE				
MFG. ENGR:		SOT-223 (TO-261)							
CHECKED BY:		SIZE	FSCM NO	PART NO.					REV
DRAWN BY: R. ERBACHER	1-30-96	А			21-0264				Α
DO NOT SCALE DWG.		SCALE	N/A			SHEET	1	OF	1