




## 20MHz 2-Channel Digital Oscilloscope

3.8" (97mm) color LCD display

Makes viewing multiple waveforms easy


## **Features:**

- Auto-set function optimizes the position, range, timebase, and triggering to assure a stable display of virtually any waveform
- · Peak Detect function for 50ns glitch capture
- XY Mode
- · Five Automatic Measurements: Frequency, Cycle, Average, Peak to Peak, RMS
- Waveform Math: Add, Subtract, Multiply, and Divide
- Average Mode for smoothing waveforms
- Persistence Mode for observing dynamic signals
- Store and recall up to 4 waveform screens and setups
- USB interface and software for transferring waveforms and data

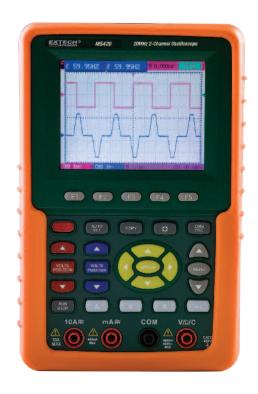



A. Complete with two 1X/10X oscilloscope probes, test leads, Windows® 95/98/NT/2000/ME/XP compatible USB software and cable, current shunt. capacitor measuring module, adjustment screw driver, Universal AC adaptor/ charger, and hard carrying case



B. Software PC screen Dual trace testing or troubleshooting of printed circuit boards and

electronic assemblies

**Specifications** Oscilloscope Functions 3.8" (96mm) color LCD; 320 x 240 pixels Display Size Bandwidth 20MHz 100MS/s Real time sample rate Risetime 17.5ns Channels 6K points per channel Record Length Glitch Capture 5mV to 5V/div Vertical Sensitivity Vertical Resolution 8 bits Timebase Range 5ns to 5s/div Sample, Average, Peak Detect Sample Mode Trigger Modes Free Run, Single Shot, Edge, Video Trigger Source CH1, CH2 **Trigger Coupling** AC, DC 1MΩ/20pF Input impedance Max Input Voltage 400V (peak) **Cursor Measurement** Voltage and time **True RMS MultiMeter Functions** AC/DC Voltage 400mV, 4V, 40V, 400V AC/DC Current 40mA, 300mA, 20A  $400\Omega$ ,  $4k\Omega$ ,  $40k\Omega$ ,  $400k\Omega$ ,  $40M\Omega$ Resistance Capacitance 51.2nF to 100µF Diode and Continuity Yes PC Interface USB cable 6 hours Li-ion rechargeable battery; AC Adaptor/Charger Power Supply Dimensions/Weight 7 x 4.4 x 1.6" (180 x 113 x 40mm) / 24.3oz (690g)

## **Ordering Information:**

MS420......20MHz Dual Channel Digital Oscilloscope ......\$899.00

