




- [ORION FANS](#)
- [About Us](#)
- [Contact Us](#)
- [News](#)
- [Tech Info](#)
- [Our Products](#)
- [Distributors](#)
- [Representation](#)
- [FAQ](#)
- [How to Purchase](#)



ORION FANS DC Fan Trays can be customized with many different control mechanisms. As perhaps the most advanced fan tray currently available we can make it do virtually anything you may need it to do - quickly and economically. Let us quote on your requirements.

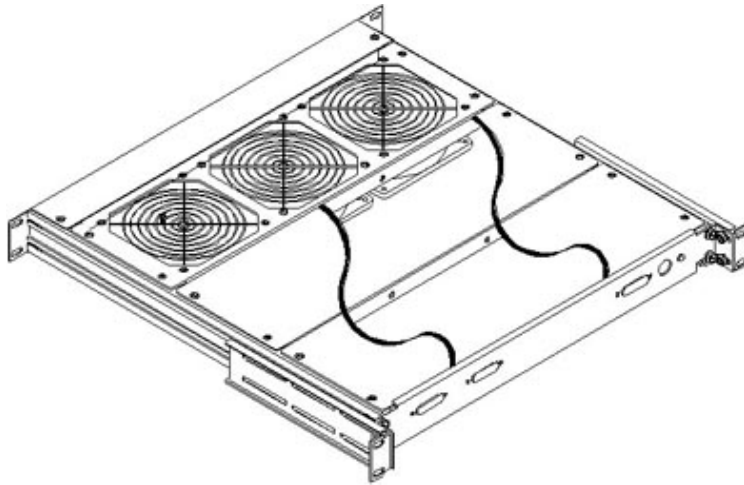

[View Explosion Diagram of Fan Tray](#)

Model Number	No. Fans	Speed (RPM)	Max. CFM	Noise (db)	Volts	Voltage Range	Watts	
OD300-12	3	3100	330	47	12	8 ~ 14	15	
OD300-24	3	3100	330	47	24	10 ~ 29	15	
OD300-48	3	3100	330	47	48	15 ~ 53	15	
OD600-12	6	3100	660	47	12	8 ~ 14	30	
OD600-24	6	3100	660	47	24	10 ~ 29	30	
OD600-48	6	3100	660	47	48	15 ~ 53	30	
OD900-12	9	3100	990	47	12	8 ~ 14	45	
OD900-24	9	3100	990	47	24	10 ~ 29	45	
OD900-48	9	3100	990	47	48	15 ~ 53	45	
OD300A-12[module]	3	3100	330	47	12	8 ~ 14	15	
OD300A-24[module]	3	3100	330	47	24	10 ~ 29	15	
OD300A-48[module]	3	3100	330	47	48	15 ~ 53	15	

