




**High capacity  
PhotoMOS Relay.  
(Load current Max. 4A)  
DC load type is available.**

**Power PhotoMOS  
(AQZ10○, 20○)**

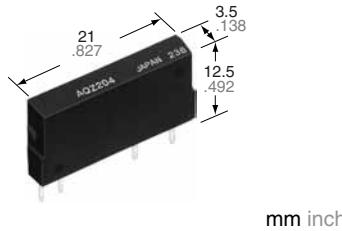

AC/DC type



DC type

## FEATURES

1. **High capacity PhotoMOS Relay in a compact and slim 4-pin SIL**
2. **Extremely low ON resistance**
3. **Control low-level signal**  
Power Photo MOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
4. **Low-level off state leakage current**
5. **High I/O isolation voltage 2,500 V**
6. **Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side**
7. **Eliminate the need for a power supply to drive the power MOSFET**
8. **PC board layout is simplified**
9. **No restriction on mounting direction**
10. **Varistor incorporated type is also available.**

## TYPICAL APPLICATIONS

- High-speed inspection machines
- IC checker
- NC machine, Robots
- Office machines
- Telecommunication
- Automotive

## TYPES

### 1. AC/DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	3.0 A	AQZ202	25 pcs.	500 pcs.
100 V	2.0 A			
200 V	1.0 A			
400 V	0.5 A			

### 2. DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	4.0 A	AQZ102	25 pcs.	500 pcs.
100 V	2.6 A			
200 V	1.3 A			
400 V	0.7 A			

Notes: Load voltage and current of AC/DC type: Peak AC/DC.

Load voltage and current of DC type: DC

# Power PhotoMOS (AQZ10○, 20○)

## RATING

### 1. AC/DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA				
	LED reverse voltage	V <sub>R</sub>	5 V				
	Peak forward current	I <sub>FP</sub>	1 A				f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW				
Output	Load voltage (Peak AC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current	I <sub>L</sub>	3.0 A	2.0 A	1.0 A	0.5 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	1.6 W				
Total power dissipation		P <sub>T</sub>	1.6 W				
I/O isolation voltage		V <sub>iso</sub>	2,500 V AC				
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures		
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Condition	
Input	LED operate current	Typical Maximum	I <sub>fon</sub>	1.0 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V		
				3.0 mA				
Input	LED turn off current	Minimum Typical	I <sub>loff</sub>	0.4 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V		
				0.9 mA				
Output	LED dropout voltage	Typical Maximum	V <sub>F</sub>	1.25 V (1.16 V at I <sub>F</sub> = 10 mA)		I <sub>F</sub> = 50 mA		
				1.5 V				
Output	On resistance	Typical Maximum	R <sub>on</sub>	0.11 Ω	0.23 Ω	0.7 Ω	2.1 Ω	
				0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω	
Transfer characteristics	Off state leakage current	Maximum	—	10 μA		I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.		
Transfer characteristics	Switching speed	Turn on time*	T <sub>on</sub>	2.46 ms	2.40 ms	1.12 ms	1.65 ms	
				5.0 ms		I <sub>F</sub> = 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V		
		Turn off time*	T <sub>off</sub>	5.64 ms	5.65 ms	2.57 ms	3.88 ms	
				10.0 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V		
Transfer characteristics	I/O capacitance	Typical Maximum	C <sub>iso</sub>	0.8 pF		f = 1 MHz V <sub>B</sub> = 0 V		
				1.5 pF				
Transfer characteristics	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000 MΩ		500 V DC		
Transfer characteristics	Maximum operating speed	Maximum	—	0.5 cps		I <sub>F</sub> = 10 mA Duty factor = 50% I <sub>L</sub> = Max., V <sub>L</sub> = Max.		
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm		2 hours for 3 axes		
Shock resistance		Minimum	—	4,900 m/s <sup>2</sup> {500 G} 1 ms		3 times for 3 axes		

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

For type of connection.

\*Turn on/off time

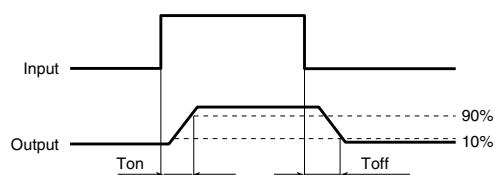

# Power PhotoMOS (AQZ10○, 20○)

## 2. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA				
	LED reverse voltage	V <sub>R</sub>	5 V				
	Peak forward current	I <sub>FP</sub>	1 A				
	Power dissipation	P <sub>in</sub>	75 mW				
Output	Load voltage (DC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current (DC)	I <sub>L</sub>	4.0 A	2.6 A	1.3 A	0.7 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	1.35 W				
Total power dissipation		P <sub>T</sub>	1.35 W				
I/O isolation voltage		V <sub>iso</sub>	2,500 V AC				
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures		
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Condition
Input	LED operate current		I <sub>Fon</sub>	1.0 mA			
				3.0 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
	LED turn off current		I <sub>off</sub>	0.4 mA			
				0.9 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
Output	LED dropout voltage		V <sub>F</sub>	1.25 V (1.16 V at I <sub>F</sub> = 10 mA)			
				1.5 V		I <sub>F</sub> = 50 mA	
	On resistance		R <sub>on</sub>	0.05 Ω	0.081 Ω	0.34 Ω	1.06 Ω
				0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω
Transfer characteristics	Off state leakage current		—	10 μA		I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.	
	Switching speed	Turn on time*	T <sub>on</sub>	1.66 ms	1.89 ms	0.83 ms	1.01 ms
				5.0 ms		I <sub>F</sub> = 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
				3.79 ms	4.50 ms	1.75 ms	2.34 ms
				10.0 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
	Turn off time*	Typical	T <sub>off</sub>	0.15 ms	0.19 ms	0.08 ms	0.08 ms
		Maximum		3.0 ms		I <sub>F</sub> = 5 mA or 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
	I/O capacitance		C <sub>iso</sub>	0.8 pF		f = 1 MHz V <sub>B</sub> = 0 V	
	Initial I/O isolation resistance			1.5 pF			
	Maximum operating speed		Minimum	R <sub>iso</sub>	1,000 MΩ		500 V DC
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm		2 hours for 3 axes	
Shock resistance		Minimum	—	4,900 m/s <sup>2</sup> {500 G} 1 ms		3 times for 3 axes	

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

For type of connection.

\*Turn on/off time

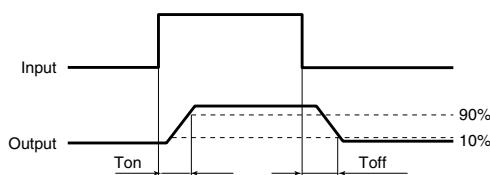

- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.