

PATLITE

TYPE 4/4X/13 Indoor, Direct-Mount The LME Series indicating light provides the latest in LED technology

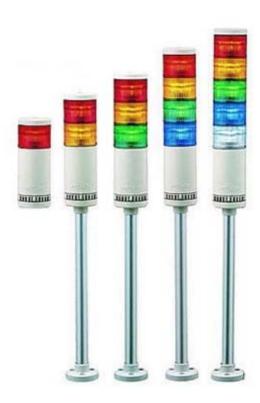


SIZE:	60mm diameter
INPUT VOLTAGE	- AC/DC24V
OPTIONS:	- AC120V
FUNCTIONS	- Continuous only
AVAILABLE:	- Continuous, Flashing, Alarms
MOUNTING OPTIONS:	- Pole mount: with 300mm aluminum pole, plastic circular
	bracket
	- Direct mount: includes 3 mounting nuts
BODY STYLE:	- Pre-assembled, pre-wired
	- Interchangeable and stackable after purchase
BODY COLOR:	Beige
TIERS:	1-5 modules can be stacked
MODULE COLORS:	Red / Amber / Green / Blue / Clear
ALARMS (FB STYLE	- Alarm 1: selectable, single-tone, intermittent (fast beep)
ONLY):	alarm, 85dB (at 1m)
	- Alarm 2: selectable, single tone, intermittent (slow beep)
	alarm, 85dB (at 1m)
RATINGS:	- CE (24V only)
	- UL Component Recognition (US)
	- UL Component Recognition (Canada)
	- RoHS
PROTECTION:	- IP-65 (LME, LME-W)
	- IP-54 (LME-FB, LME-FBW)
	- Type 4 / 4X / 13 (indoor, direct-mount only)
CONTROL OPTIONS:	- Dry contact closure such as switches or relay contacts
	- Open-collector transistor (NPN or PNP for DC24V, NPN for
	AC120V)
	- Direct voltage control for DC24V, continuous and alarm
	functions only

PART NUMBER GUIDE

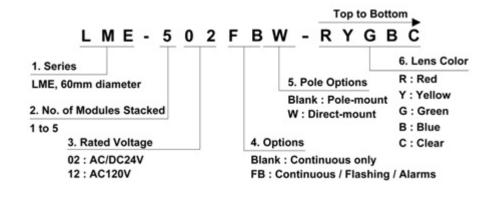


© PATLITE U.S.A. All Rights Reserved.

Mechanical Diagrams (Dimensions in mm)

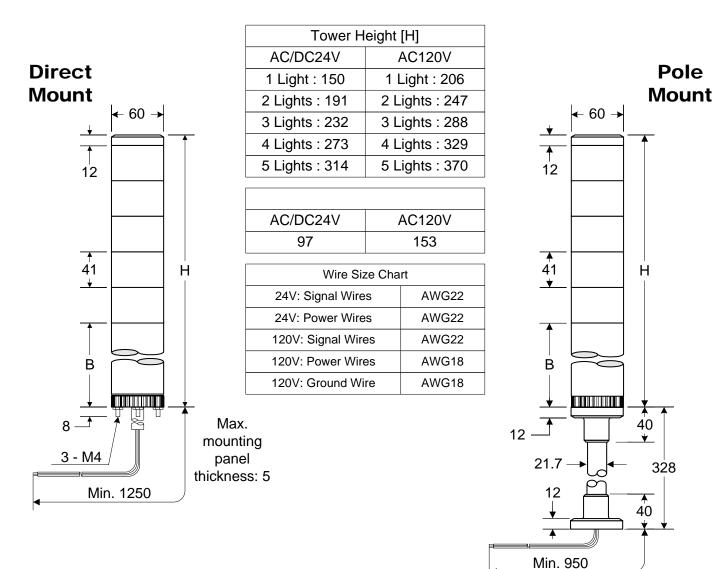

Mounting Dimensions

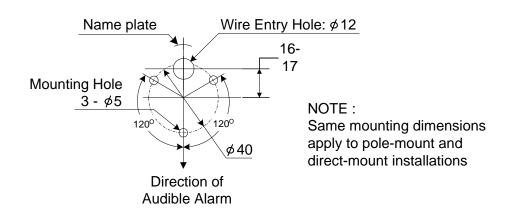

LME

Specifications

L	M	Ε

Input Voltage			Options		A	C/DC24V		AC120V			
		Rated Voltage		AC/DC2	24V (50-60 H	/ (50-60 Hz) AC120V (50-60 Hz))		
		Operatir	Operating Voltage				Rated Voltage + or - 10%				
Operating temperature Range				-30°C ~ +60°C							
Relative Humidity			Less than 90%								
Flashing Cycle	e ("FB" styles only)		60 + or – 12 flashes per minute								
Alarm Sound Level ("FB" styles only, measured from the front direction, characteristic: A)		Alarm 1	Alarm 1 Max: 84 + or – 4dB (at 1m) Min: 64 + or – 4dB (at 1m)								
		Alarm 2 Max: 86 + or – 4dB (at 1m) Min: 66 + or – 4dB (at 1m)									
Alarm Sound Description ("FB" styles only)		Intermittent, single-tone; Alarm 1: fast beep, Alarm 2: slow beep									
Mounting Loca	tion Options		Indoor use only								
Mounting Direct	ction Options					Uprig	ht only				
Protection Rati	ina		LME,	LME, LME-W IP-65							
Protection Rating		LME-FB,	LME-FB, LME-FBW IP-54								
Vibration			19.6m/s ² (30Hz) (2 hours each: front-back, right-left, up-down)								
Insulation Resi	istance		More than	More than 1 Megohm between terminals and chassis at DC500V							
Withstand Voltage (AC/DC24V)				AC500V applied between terminals and chassis for 1 minute without breaking insulation							
Dielectric Volta	age (AC120V)			applied betwe	en terminal			te without bro	eaking insula	ation	
Luminous Inter			Red		Amber			Blue		Clear	
(mcd = millicar	ndela)		350mdc 580mcd 130			0mcd 340mcd 1200mcd					
	_	CE	EN60958-1: 1993								
Applicable Standards UL		UL Component Recognition per UL-508 (File No. E215660)									
		RoHS			F	RoHS Directi	ve 2005/95/	EC			
Power Consumption		LED Modules				Alarm 1 Alarm 2					
Fower Consult	πριστ	Red	Amber	Green	Blue	Clear	Steady	Inrush	Steady	Inrush	
AC/DC24V	Current (mA @ 24V)	53	53	20	20	20	40	250	40	250	
AC/DCZ4V	Watts	1.3	1.3	0.5	0.5	0.5	1.0		1.0		
AC120V	Watts	2.0	2.0	0.8	0.8	0.8	1.4		1.4		
ACIZOV	Standby Power		1.7W @ AC120V								
Contact Capac	city (Is = current capac	ity; Vs = with	stand voltage;	Vc = dielectr	ic breakdow	/n voltage; l∟	= leakage c	urrent)			
		,	Contact Capacity				Transistor Capacity (NPN and PNP)				
AC/DC24V	LED Light Mod	dule	$I_{\rm S} >= 100 \text{mA}; V_{\rm S} >= AC35 \text{V}$				$I_{\rm C} >= 100 \text{mA}; V_{\rm C} >= 35 \text{V}$				
	Alarm			Is >= 300mA; Vs >= AC35V			I _C >= 300mA; V _C >= 35V				
	Power Supp	ly	ls :	$I_{\rm S} >= 500 \text{mA}; V_{\rm S} >= AC35 \text{V}$							
		-		Contact Ca	apacity			Transistor Capacity (NPN)			
AC120V	LED Light Module (S	ignal wire)	Is >= 100mA; Vs >= AC35V				$I_{\rm C} >= 100 \text{mA}; V_{\rm C} >= 35 \text{V}$				
	.	Alarm (Signal wire)		$I_{\rm S} >= 300 \text{mA}; V_{\rm S} >= AC35 \text{V}$				$I_{C} \ge 300 \text{mA}; V_{C} \ge 35 \text{V}$			
	Power Supp		ls >	I _S >=150mA; V _S >= AC125V							
	Leakage Current					$I_{L} = 0.1 m_{e}$	A or less				
Fuse (not included)			1A (250V)								
						יה עצ					