

# storm

## 5000 Series Toughened Display Bezel



## For menu driven applications in the toughest environments

- Impact resistant  
10J BS EN 60068-2-75: 1997)
- Weather sealed for outdoor use
- Clear, scratch resistant,  
anti-reflective display window
- Responsive menu navigation and  
option select keys
- Under-panel fixing through panel  
thickness of up to 2mm
- Supplied complete with panel gasket
- Resistant to petrochemicals and most  
commonly used cleaning agents
- -20°C (dry) to +60°C (bezel only –  
display temp range specified  
according to application)
- Accomodates most LCDs with  
mounting centers at 93 x 55mm  
or 89.9 x 48.8mm
- Available with or without  
optional 122 x 32 dot graphic LCD  
or 4 x 20 character LCD



UK Email: [sales@storm-interface.com](mailto:sales@storm-interface.com) Tel: +44 (0)1895 431421  
USA Email: [sales.usa@storm-keypads.com](mailto:sales.usa@storm-keypads.com) Tel: +1 (630) 472 5360

[www.storm-interface.com](http://www.storm-interface.com)


Storm Interface products include technology  
protected by international patents and design  
registration. All rights reserved.

# storm

## 5000 Series – Toughened Display Bezel




### Rear View (No LCD)

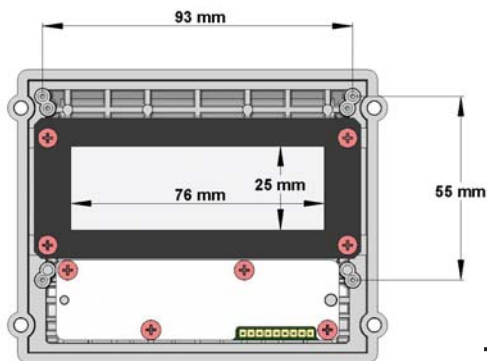


WINDOW VIEW AREA IS 76 mm x 25 mm  
LCD MOUNTING CENTRES AT 93 mm x 55 mm

### Overall Dimensions

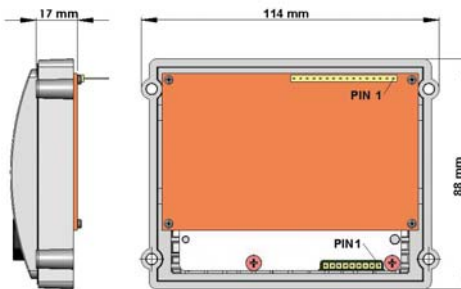


### Unit with LCD fitted

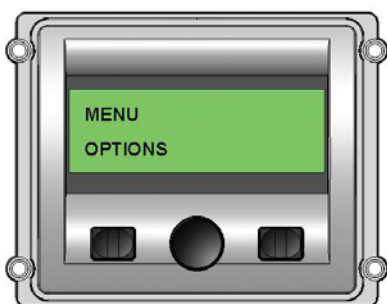

Position 1	Position 2	Position 3
R1C1	R1C2	R1C3

### Host Panel Cutout

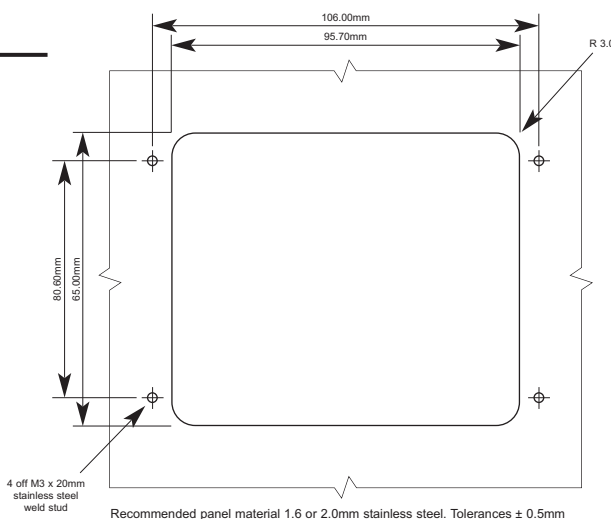

### Matrix Keypad Connections

Contact Connections (viewed from rear of keypad)

PINS	1	2	3	4	5	6	7	8	9
PIN NO.	9	8	7	6	5	4	3	2	1

### Contact Matrix

PINS	ROW / COLUMN
7	C1
6	C2
5	C3
3	R1

### Specifications

Responsive menu navigation and option select keys

Matrix Output to 0.1" square pins compatible with Molex KK Housing

Overall Size 110 mm wide x 88 mm high

Optional backlit 4 line x 20 character LCD fitted with a single row of 16 0.1" square pins LCD Operating Voltage +5V to +9V (see note \*)  
Powertips PC2004-A-LRU-H

Panel Mount Gasket included

Responsive key action travel 1.5 mm (nominal) force 130 gm (nominal)

Panel Cutout 96 mm x 81 mm

Operating Temp -20°C to +60°C

Switch Rating 24 V dc (Max), 50 mA (Max)

Contact Resistance 100 Ohms (Max)

### Installation

1. Prepare host panel and connection cable(s).  
For keypad use Molex 2695 Connector 5 way (PN22-01-2051) or 9 way (PN 22-01-2091).  
For LCD use PN 22-01-2161.
2. Fit the supplied gasket over the 4 weld studs on the rear of the host panel.
3. Slide the display bezel over the studs and secure with M3 Nyloc Nuts or similar.

### Ordering Details [x] denotes packaging variant

Item	Stock No.
Display Bezel 3 Key	5001-20010[x]
Display Bezel 3 Key with 4 x 20 character display	5001-20020[x]

**Note\*: LCD Rating – Temperature Compensation**  
An LCD operating voltage varies at different temperatures. The operating voltage must rise as temperature lowers or the contrast will degrade. Conversely, the operating voltage must fall as the temperature rises or the contrast will degrade. A temperature compensation circuit is required to control the input voltage as the temperature changes.

**For Connection Information for LCD see:**  
Powertip PC 2004-A Datasheet for 4 x 20 Character LCD

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.



500-xx-08KT Rev 2  
Oct 2007



FM 39602



USA Office:  
**Storm Interface**  
600 Enterprise Drive  
Oak Brook  
Illinois 60523 USA  
Tel: +44 (0)1895 431421  
Fax: +44 (0)1895 431421  
Email: sales.usa@storm-keypads.com

UK Office:  
**Storm Interface**  
14 Bentinck Court  
Bentinck Road  
West Drayton  
Middlesex UB7 7RQ  
Tel: +44 (0)1895 431421  
Fax: +44 (0)1895 431132  
Email: sales@storm-interface.com  
www.storm-interface.com

Storm is a trademark of Keymat Technology Ltd  
Storm Interface is a trading name of Keymat Technology Ltd  
Storm Interface products include technology protected by international patents and design registration. All rights reserved.