


## 3VQ8 Product Details

---

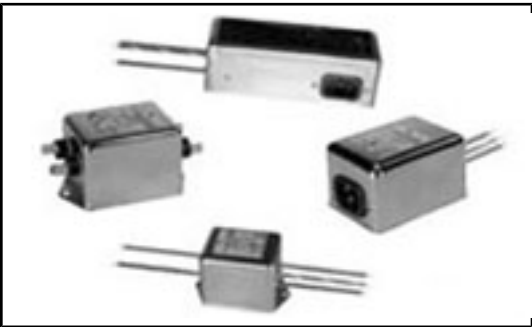

**3VQ8**

TE Internal Number: 6609049-3

 [Active](#)

### EMI/RFI Filters and Accessories

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

**Product Highlights:**

- Filter - EMI/RFI
- Filter Type = Power Line
- Q (3-20 Amp) Series
- General Purpose Application, Switching Power Supply Application
- Mount Style = Bulkhead

[View all Features](#)

## Documentation & Additional Information

### Product Drawings:

- [CUSTOMER DRAWING 3VQ8](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [Corcom Q Series](#) (PDF, English)

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version G)
- [3D Model](#) (IGES, Version G)
- [3D Model](#) (STEP, Version G)

[List all Documents](#)

### Additional Information:

- [Product Line Information](#)

### Additional Product Images:

- [Insertion Loss/Specifications](#)

### Related Products:

- [Tooling](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- [Product Type](#) = Filter - EMI/RFI
- [Filter Type](#) = Power Line
- [Filtered](#) = Yes

### Electrical Characteristics:

- [Current Rating \(Amps.\)](#) = 3
- [Voltage  \$\leq\$  \(VAC\)](#) = 250
- Leakage Current (Line-to-Ground) Max. @ 250 VAC 50 Hz (mA) = 1.27
- Leakage Current (Line-to-Ground) Max. @ 120 VAC 60 Hz (mA) = 0.73

### Termination Related Features:

- [Terminal Input - Output Combination](#) = IEC - Wire Lead

### Body Related Features:

- [Series](#) = Q (3-20 Amp)
- [Mount Style](#) = Bulkhead
- Terminal Style Output = Straight

### Contact Related Features:

- Approved Standards = UL Recognized, VDE Approved, SEV Approved, CSA Certified

### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

### Conditions for Usage:

- Need Min Size With IEC Connector = No
- Need Optional Switch, Fusing, Or Voltage Selector = No

### Operation/Application:

- [Application](#) = General Purpose, Switching Power Supply

### Other:

- Brand = Corcom
- Facility Installation = No