C&K DM Series Miniature 2 Pole Power Rocker Switches



Features/Benefits

- 3 AMPS to 10 AMPS
- Quick connect terminals
- · Double pole in miniature size
- Recessed bracket available—prevents accidental actuation

Typical Applications

- Computers
- Appliances
- Electric ranges



Specifications

CONTACT RATING: DM2X Models: 3 AMPS @ 125 V AC; 2 AMPS @ 250 V AC (UL/CSA). DM6X Models: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC (UL/CSA). 6 AMPS @ 125 V AC, 3 AMPS @ 250 V AC, T85 (VDE).

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

Materials

HOUSING & ACTUATOR: 6/6 nylon (UL94V-2), black.

MOVABLE CONTACTS: DM2X Models: Copper, silver plated. DM6X Models: Coin silver, silver plated.


STATIONARY CONTACTS & TERMINALS: Copper or brass, silver plated.

CONTACT SPRING: Music wire or stainless steel.

NOTE: Specifications and materials listed above are for standard switches. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages G-57 and G-58. For additional options not shown in catalog, consult Customer Service Center.

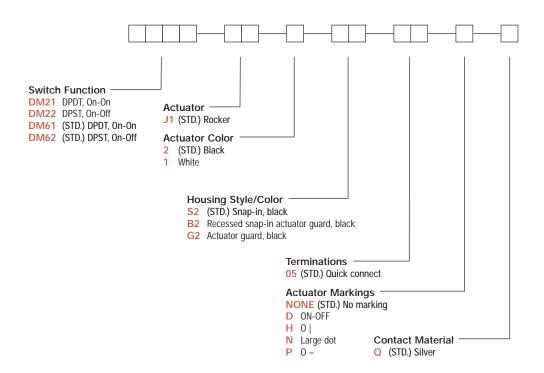



G

SWITCH FUNCTION


			SWITCH F	UNCTION	CONNECTED TERMINALS			
			POS. 1	POS. 2	POS. 1	POS. 2		
NO. POLES	MODEL NO.	AMP RATING*	4		4		SCHEMATIC	
DP	DM22 DM62 (STD.)	3 10	ON	OFF	1-1A, 2-2A	OPEN	DPST 1A 2A	
DP	DM21 DM61 (STD.)	3 10	ON	ON	1-1A, 2-2A	1-1B, 2-2B	DPDT 1A 1B 2A 2B	
DPDT .080 - 793 (20,14) (12,70)								
(2,03) (20,14) (12,70)								
Part numb	ber shown: DM61J12S	205Q			REFERENCE ONLY			

^{*} RATINGS: See page G-58 for complete ratings.

All models $_{\circ}$ **N (** $^{\circ}$ with all options. DM6X models also **(** $^{\bullet}$, see page G-58.



J1 (STD.) ROCKER




OPTION CODE	ACTUATOR COLOR			
2	(STD.) BLACK			
1	WHITE			

NOTE: Actuator finish: matte. Other colors available, consult Customer Service Center.


HOUSING STYLE/COLOR

S2 (STD.) SNAP-IN, BLACK



NOTE: Housing finish: matte. Other colors available, consult Customer Service Center.

B2 RECESSED SNAP-IN ACTUATOR GUARD, BLACK





Dimensions are shown: IN (mm) Dimensions subject to change

ITT Industries

Cannon

