


Electrical UL/CSA Electrica	al IEC Electror	ics Consumer/Aftermarket	OEM Transportation	Terminal Blocks	Systems/Services/Software
Cooper Bussmann					
Homepage About Cooper Bussmann Contact Us Privacy Legal Cooper Bussmann® Brand Site Map		GMT-2A			
	Product Information				
	Product Family:	Telecommunications			



# Fast-Acting Indicating Telecom Fuse

## 60Vdc/125Vac

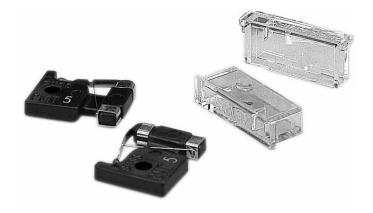

#### Catalog Symbol: GMT

Fast-acting indicating fuse for telecom circuits. Ratings:

### Volts: 60Vdc/125Vac

- Amps: 18/100 15A
- . IR: 450A @ 60Vdc
  - 300A @ 125Vac

#### Agency Information:

UL Recognized, Guide JFHR2, File E56412

#### Materials:

Body: Thermoplastic (flammability rating: UL94V0) Terminals: Tin-plated beryllium copper

#### Carton Quantity & Weight:

100 fuses per carton, 0.33 lbs. (150g.) Fuse Holders: Catalog Nos. HLS, HLT and PCT

#### **General Information:**


- For telecom, computer, or control circuits.
- Visual spring indicating and alarm circuit indicating.
- · Color coded flags designate amp rating.
- · Fuses easily replaced without use of insulated tools.
- Fuses can be removed with wire hook when mounted on minimum centers.
- GMT-X fuse cover available.
- GMT-Y fuse cover (with pull-tab) available.

#### Catalog Symbol and Color Codes


Catalog	Color	Catalog	Color Code
Symbol	Code	Symbol	
Symbol	COUE	Symbol	Coue
GMT-18/100A	Yellow	GMT-3 1/2A	White/Blue
GMT-1/4A	Violet	GMT-4A	White/Brown
GMT-3/8A	White/Gray	GMT-5A	Green
GMT-1/2A	Red	GMT-7 1/2A	Black/White
GMT-65/100A	Black	GMT-10A	Red/White
GMT-3/4A	Brown	GMT-12A	Yellow/Green
GMT-1A	Gray	GMT-15A	Red/Blue
GMT-1 1/3A	White	GMT-Dummy	Gray
GMT-1 1/2A	White/Yellow	GMT-A (alarm)*	Yellow
GMT-2A	Orange	GMT-X (cover)	Clear
GMT-3A	Blue		

\*Designed specifically for use in the Telpower  $^{\otimes}$  Series 15800 fused disconnect switch.

#### Dimensional Data — in




#### Covers - in (mm)



GMT-X Fuse Cover





GMT-Y Fuse Cover