

T255S0HIRX2

Heavy Duty Cable Tie, 250 lb. 8.86" Max. Bun. Dia. 2.16" PA66HIRHS, Black, 25/pk

Article Number: 111-25500

Part Number: T255S0HIRX2

Type: T255S

Material: PA66HIRHS




1. Base Data

Part No.	T255S0HIRX2
Type	T255S
Color	Black (BK)
Features	HellermannTyton's T255 series heavy duty cable ties are ideal for bundles requiring a strong cable tie that may also require a higher temperature rating than the T250 series. These ties have a tensile strength of 250 lbs.
Application	Used to bundle and secure wire and cable.

Application Method

Quick, simple application by hand or with HellermannTyton tensioning tools.

2. Product Dimensions

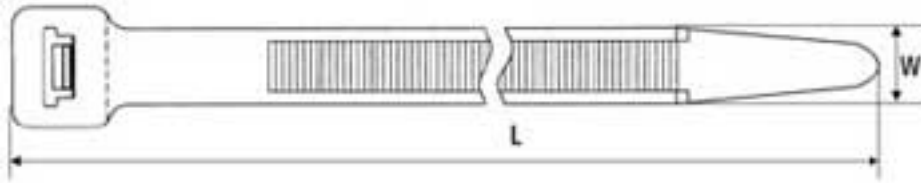

Min. Tensile Strength

250 lbs / 1115 N

Length (L)

8.86 " / 225 mm

Width (W)

.49 " / 12.5 mm

Min. Ø Bundle

1.0 " / 25.0 mm

Max. Ø Bundle

2.16 " / 55.0 mm

4. Material and Specifications

Material

Polyamide 6.6 high impact modified, heat stabilized, UV resistant (PA66HIRHS)

Material Shortcut

PA66HIRHS

Flammability

UL94 HB

Operating Temperature

-40 °F to +230 °F (-40 °C to +110 °C)
continuous

ROHS Conformity



Logistic and Packaging

Packaging Type	bag
Pkg. Qty.	25
Carton Qty.	1000
UPC	08930617296

Miscellaneous


UL Recognized (US and Canada) Yes

Heavy Duty Cable Ties

T255 Series

HellermannTyton's T255 series heavy duty cable ties are ideal for bundles requiring a strong cable tie that may also require a higher temperature rating than the T250 series. These ties have a tensile strength of 250 lbs.

Material Data	
Material	Polyamide 6.6 high impact modified, heat stabilized (PA66HIRHS)
Operating Temperature	-40 °F to +230 °F (-40 °C to +110 °C) continuous
Flammability	UL94 HB



Product Selection			Min. Tensile Strength	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type						
111-25500	T255S0HIRX2	T255S	250 lbs (1115)	8.86" (225)	2.16" (55)	.49" (12.5)	Black	25
111-25400	T255R0HIRX2	T255R	250 lbs (1115)	20.28" (520)	5.71" (145)	.49" (12.5)	Black	25
111-25300	T255M0HIRX2	T255M	250 lbs (1115)	22.05" (565)	6.30" (160)	.49" (12.5)	Black	25

Installation tools - MK9, MK9HT, MK9P.

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.