



ASDX030A24R



ASDX Series pressure sensor,
amplified, absolute, 0 psi to 30 psi
operating pressure, "A2" DIP package,
straight port

Actual product appearance may vary.

Features

- ASIC-enhanced output
- Wide compensated temperature range 0 °C to 85 °C [32 °F to 185 °F]
- Available in absolute, differential and gage types
- Pressure ranges from 0 psi to 1 psi through 0 psi to 30 psi
- Accuracy +/-2.0% max. V full scale
- Quantization step of 3 mV
- Response time of 8 ms

Potential Applications

- Flow calibrators
- Ventilation and air flow monitors
- Gas flow instrumentation
- Sleep apnea monitoring and therapy equipment
- Barometry
- HVAC controls
- Pneumatic controls

Description

The ASDX Series is an amplified version of Honeywell's proven performer and industry leading SDX Series sensor. The ASDX sensor's footprint is slightly larger than the SDX; however, it offers a high level output (4.0 Vdc span) on a very cost-effective basis. This series is fully calibrated and temperature compensated with on-board Application Specific Integrated Circuitry (ASIC).

These DIP (Dual In-line Package) sensors are designed for use with non-corrosive, non-ionic working fluids; such as air and dry gases. Sensors are available to measure absolute, differential and gage pressures. The absolute sensors have an internal vacuum reference and an output voltage proportional to absolute pressure. The differential sensors allow application of pressure to either side of the sensing diaphragm and may be used for differential or gage measurements. Bidirectional versions are also available.




All ASDX Series sensors are accurate to within +/-2.0% full scale and are designed for operation from a single 5.0 Vdc supply.

Product Specifications	
Measurement Type	Absolute
Signal Conditioning	Amplified
Pressure Range	0 psi to 30 psi
Maximum Overpressure	60 psi
Supply Voltage	4.75 Vdc min., 5.25 Vdc typ., 6.50 Vdc max.
Compensated	Yes
Output Calibration	Yes
Response Time	8.0 ms typ., 11.0 ms max.
Termination	PCB
Port Style	Straight
Package Style	A2 DIP
Full Scale Span	4.0 Vdc
Zero Pressure Offset	0.420 min., 0.500 typ., 0.580 max.
Total Error (% Full Scale)	± 2.0% span
Shock	100 g for 11 ms

Vibration	10 g at 20 Hz to 2000 Hz
Operating Temperature Range	-20 °C to 105 °C [-4 °F to 221 °F]
Compensated Temperature Range	0 °C to 85 °C [32 °F to 185 °F]
Storage Temperature Range	-40 °C to 125 °C [-40 °F to 257 °F]
Media Compatibility	Clean, dry gases only.
UNSPSC Code	411121
UNSPSC Commodity	411121 Transducers
Life	1 Million cycles min.
Comment	Lead soldering temperature 2 s to 4 s at 250 °C [482 °F]
Availability	Global
Series Name	ASDX

PROPRIETARY DATA
 This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of **SENSYM ICT**

REVISIONS				
LTR	DESCRIPTION	ECN#	DATE	APP'V
A	INITIAL RELEASE	9794	08/16/01	B.D
B	CHANGED VIEWS	10507	08/07/02	B.D

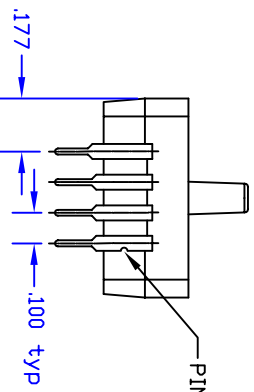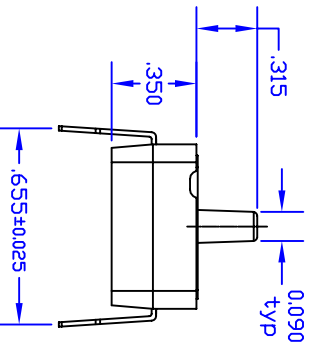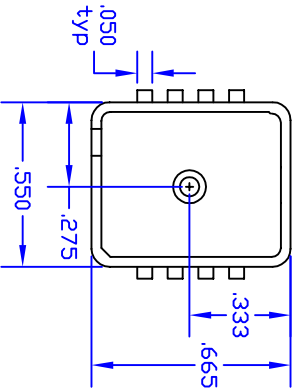

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ANGULAR ±1° FINISH: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ANGULAR ±1° MATERIAL: N/A

APPROVALS DATE DRAWN BY: Brian D. 07-30-02 PRODUCT ENGR. Brian D. 07-30-02 ORIGINATOR CHECK DO NOT SCALE DRAWING

TITLE: OUTLINE DRAWING, ASDXXXXA2
 Sensym ICT An Invenys Co.
 1804 MCGARTHY BLVD. MILPITAS, CA 95035
 SCALE: 5:1 CODE IDENT. 07234 SHEET 1 OF 1
 SIZE: B DRAWING NUMBER: SS60238 REV. B

USED ON ASDXXXXA2

4

3

2

1