



## UGCTE3S-X0




- Exclusive material with hooks and loops on same side allows user to secure a greater range of bundle diameters, including smaller bundles
- Low profile contoured cinch ring reduces overall bundle size
- Hook and loop material maintains network data integrity by protecting against over-tensioning of high performance copper and fiber cables
- Adjustable, releasable and reusable hundreds of times – ideal for applications requiring frequent moves, adds or changes
- Tapered tip facilitates easy, snag-free threading to speed installation
- Brass grommet (on UGCTC and UGTE styles) assures reliable installations with a strong metal grommet that resists pullout
- Use flat-head screws for grommet applications
- Operating temperature range: 0°F to 220°F (-18°C to 104°C)

Note: Minimum 2" overlap required to achieve loop tensile rating

▪ Part Number	UGCTE3S-X0
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Hook & Loop Tie, End Mount Grommet, 12.0", Standard cross section
▪ Product Type	Same-sided Cinch Ties
▪ Material	Nylon Hook & Loop, Brass Grommet, Nylon Ring
▪ Color	Black
▪ CSA Certified	No
▪ UL Listed (File #E56854)	No
▪ UL Recognized (File #E56854)	No
▪ Length (In.)	12.0
▪ Length (mm)	305
▪ Width (In.)	.850
▪ Width (mm)	21.6
▪ CE Compliant	Yes
▪ Cross Section	Standard
▪ Head Height (In.)	.450
▪ Head Height (mm)	11.4
▪ Head Width (In.)	1.10
▪ Head Width (mm)	27.9
▪ Locking Style	Releasable
▪ Max. Bundle Diameter (In.)	3.00
▪ Max. Bundle Diameter (mm)	76
▪ Min. Loop Tensile Strength (Lbs.)	50
▪ Min. Loop Tensile Strength (N)	222

■ Pricing Description	Hook & Loop Tie, End Mount Grommet, 12.0"L (305mm), .85"W (21.6mm), Black
■ Screw Size	#12
■ Screw Size Metric	M5
■ Temperature Range	0°F to 140°F
■ Thickness (In.)	.100
■ Thickness (mm)	2.5
■ Min. Order UOM	PC
■ Min. Order Qty.	10
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

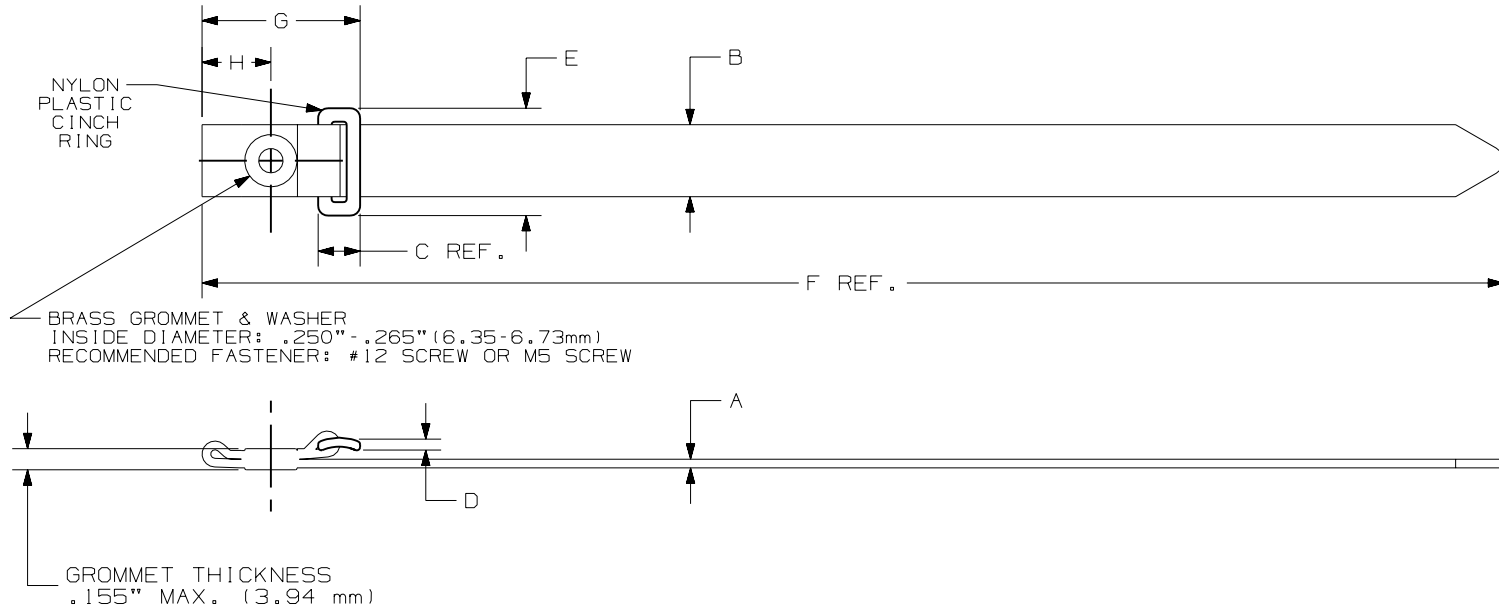

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PARTS (g)
	MIN. in (mm)	MAX. in (mm)											
UGCTE3S	1.0 (25.4)	3.0 (76.2)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	12.0 (305)	1.7 (43)	.6 (15)	50 (222)	STANDARD	.87 (396)
UGCTE5S	1.0 (25.4)	5.0 (127)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	18.7 (475)	1.7 (43)	.6 (15)	50 (222)	STANDARD	1.08 (490)

NOTES:

- 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

SS\_27385.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES  
ULTRA-CINCH HOOK & LOOP TIES  
END MOUNT GROMMET

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .25 (.XXX) ± .030  
(.XX) ± .125 ANGLES ±

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
JABO  
DATE  
10/22/02  
CHK'D  
DWW

MAT'L:  
WOVEN NYLON  
HOOK/LOOP  
COLOR: BLACK  
EXCEPT GROMMET

SCALE  
NONE  
DRAWING NO.  
SS-27385  
DWG  
A  
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
6	4/12/06	FAB		ADDED WEIGHT TO DRAWING	27385	6		