




Datasheet Crimp Terminals

02-06-5103

1.57mm (.062") Diameter, Standard .062" Pin and Socket Crimp Terminal, Female, with 0.38µm (15µ") Gold (Au) Plated Brass Contact, 18-24 AWG, Bag

[View all parts in series 1561](#)
[2D Dimensions](#)
[E-mail this page](#)
[Samples](#)
[Buy](#)

Status	Active
Product Name	Standard .062"
Molex Series	1561
Gender	Female
Wire Size (AWG)	18, 20, 22, 24
Wire Insulation Diameter	1.52-3.05mm (.060-.120")
Packaging	Bag
PHYSICAL	
Contact	Brass (CuZn)
Plated	Pre
Plating Contact	Gold (Au)
Plating in Crimp Area	Gold (Au) Flash Overall
Under Plating	Nickel (Ni)
Plating Thickness	0.38µm (15µ")
REFERENCE	
Termination	Good Crimps
990 Catalog Page	K-60
MX01 Catalog Page	F-136
Old Part Number	1561-(P560)L

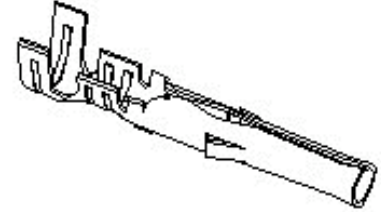

This part is
**ELV and RoHS
COMPLIANT**

ENVIRONMENT

RoHS Compliant Yes

Related Products

APPLICATION TOOLING		
Region	Description	Product Number
Americas	Manual Extraction Tool	11-03-0002
Americas	Hand Crimper - DISTRIBUTION ONLY	63811-1000
Asia	Hand Insertion Tool	11-02-0001
Europe	Parallel Action Handtool for 1560, 1561 Terminals, 18-24 AWG	69008-0952
Europe, Americas	Hand Crimp Tool	63811-3300

2D DRAWING - For reference only. See technical [Drawing \(PDF\)](#) for design-in purposes.

DIMENSIONS

Contact Material Thickness	0.20mm (.008")
Dimension C	3.56mm (.140")
Dimension D	2.80mm (.110")
Dimension E	2.03mm (.080")
Dimension F	2.74mm (.108")
Dimension G	2.03mm (.080")
Dimension H	1.52mm (.060")

