



Audio

## RX Series



### NC4MRX-B


The RX Series is the right angle version of the XX cable connector series. The successor of the RC series offers several new features which make it more reliable, easier to assemble and improves contact integrity as well cable strain relief.




4 pole right angle male cable connector, black metal housing, gold contacts

#### Features & Benefits

- Extra slim right-angle connector
- 5 selectable cable outlet positions
- Male connector with improved locking recess without "window", more stringent housing increases durability
- Improved chuck type strain relief provides higher pull-out force and makes assembly easier and faster
- Boot with polyurethane gland gives high protection to cable bending stresses
- Coloured rings and boots available for coding or identification
- Sleek and ergonomic design - valuable and handy

#### ACCESSORIES



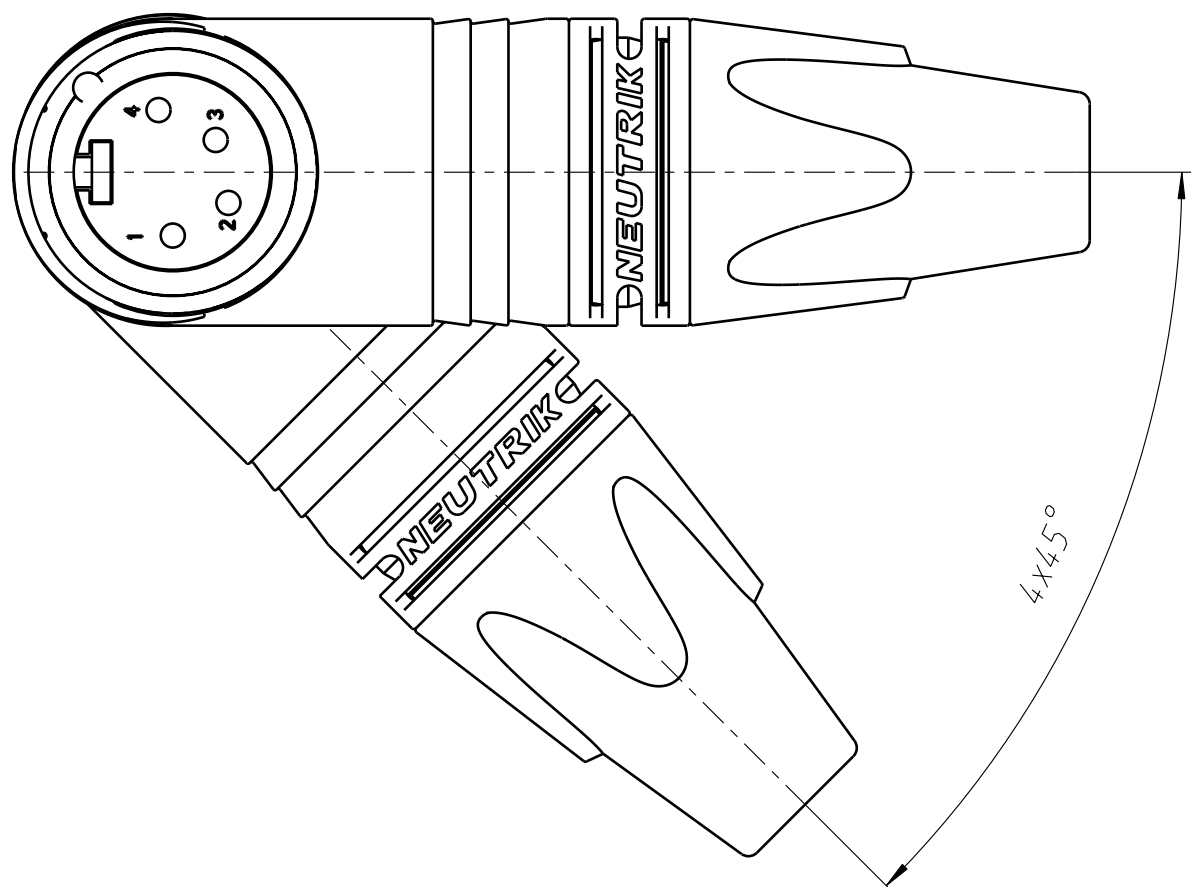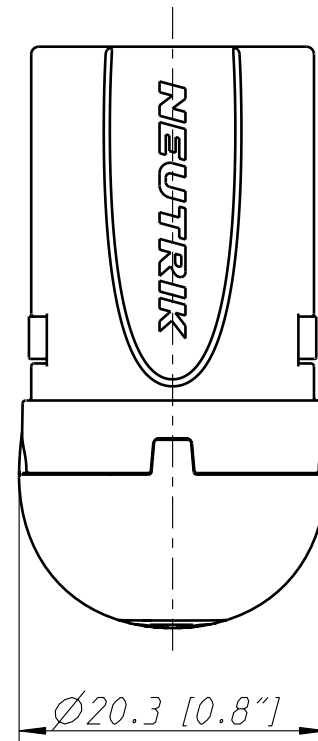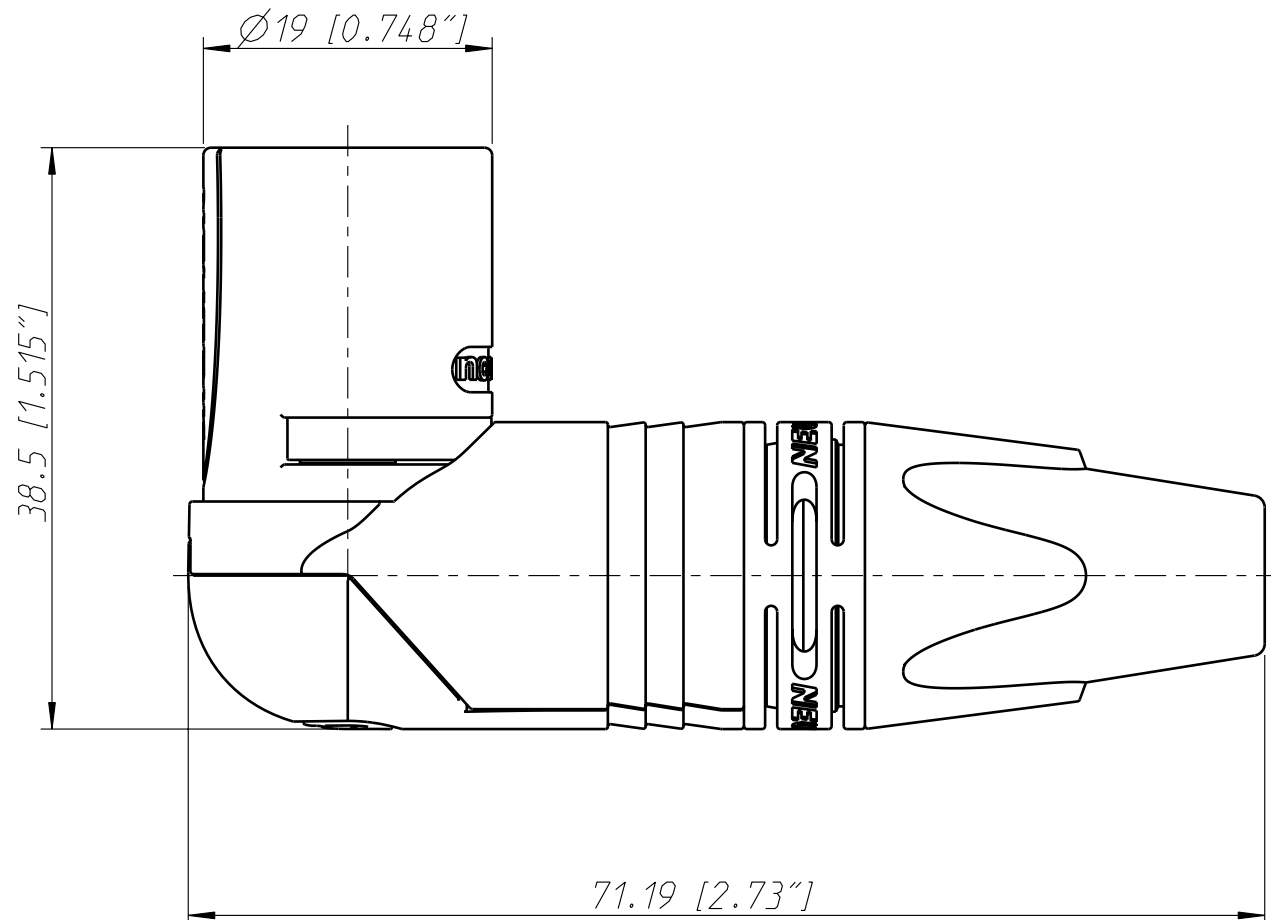


|   |                |                          |              |                      |             |
|---|----------------|--------------------------|--------------|----------------------|-------------|
| Allgemeintoleranzen<br>ISO 2768-m                     | Werkstoff<br>- | Massstab:<br>2:1<br>(A3) | Gezeichnet   | 11.07.06             | jutz b      |
|   |                |                          | Freigegeben  | -                    | -           |
| Zeichnung urheberrechtlich<br>geschuetzt (DIN 34) (C) | -              | -                        | Geaendert    | -                    | -           |
|   |                |                          | Aend.-Nr.    | -                    | Aend.-Index |
| Benennung<br>RX-Serie<br>NC 4MRX                      |                |                          | Ersatz fuer: | Blatt 1<br>von 2 Bl. |             |
| NEUTRIK AG FL-9494 SCHAAN                             |                |                          | Zeichn. Nr.  | ST-NC 4MRX           |             |



Audio

## RX Series

### NC4MRX-B

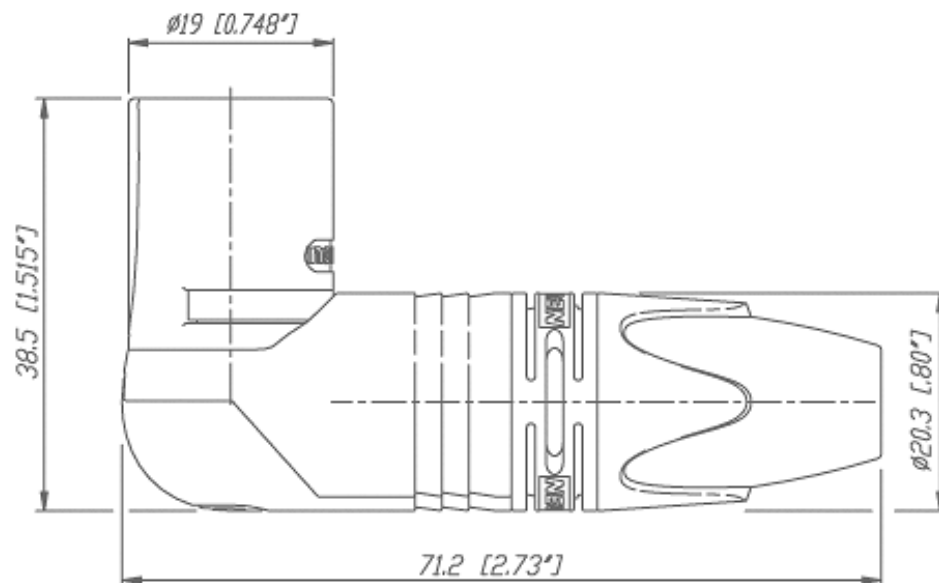

There are no technical infos for this product.

#### Product

|                |      |
|----------------|------|
| Connector Type | XLR  |
| Gender         | male |

#### Electrical

|                              |   |
|------------------------------|---|
| Capacitance between contacts | $\leq 7$ pF                             |
| Contact resistance           | $\leq 3$ m $\Omega$                     |
| Dielectric strength          | 1,5 kVdc                                |
| Insulation resistance        | $> 2$ G $\Omega$ (initial)              |
| Insulation resistance        | $> 1$ G $\Omega$ (after damp heat test) |
| Rated current per contact    | 10 A                                    |
| Rated voltage                | 50 V                                    |

#### Mechanical

|                  |                          |
|------------------|--------------------------|
| Cable O.D.       | 3.5 - 8.0 mm             |
| Insertion force  | $\leq 20$ N              |
| Withdrawal force | $\leq 20$ N              |
| Lifetime         | $> 1000$ mating cycles   |
| Wire size        | max. 1.5 mm <sup>2</sup> |

|                |                 |
|----------------|-----------------|
| Wire size      | max. 16 AWG     |
| Wiring         | Solder contacts |
| Locking device | latch lock      |

### Material

|                 |                                   |
|-----------------|-----------------------------------|
| Boot            | Polyuretan                        |
| Bushing         | Polyamide (PA 6 15% GR)           |
| Contact plating | 0.2 µm Au hard alloy over 2 µm Ni |
| Contacts        | Brass (CuZn39Pb3)                 |
| Insert          | Polyamide (PA 6.6 30 % GR)        |
| Locking element | Zinc diecast (ZnAl4Cu1)           |
| Shell           | Zinc diecast (ZnAl4Cu1)           |
| Shell plating   | Black chromium                    |
| Strain relief   | Polyacetal (POM)                  |

### Environmental

|                     |                           |
|---------------------|---------------------------|
| Flammability        | UL 94 HB                  |
| Standard compliance | IEC 61076-2-103           |
| Protection class    | IP 40                     |
| Solderability       | Complies with IEC 68-2-20 |
| Temperature range   | -30 °C to +80 °C          |

### Optical

### Mobile Cables