




## PL3M2S-L

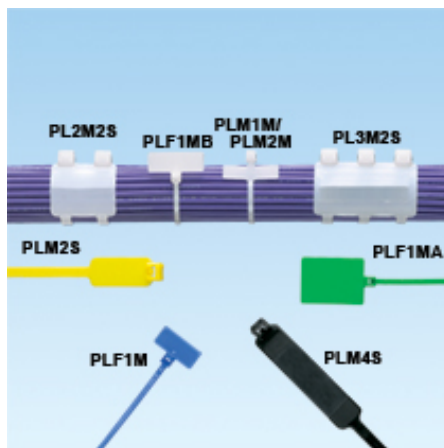


- For indoor use
- Used to fasten and identify bundles at the same time
- One-piece construction for consistent performance and reliability
- Can be marked with *PANDUIT* marker pens or custom imprinted with text, symbols, or trademarks available using *PANDUIT* Custom Hot Stamping Service
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

• Part Number	PL3M2S-L
• RoHS Compliancy Status	Compliant
• Part Description	Marker Tie, Wrap, 7.4", Standard cross section
• Product Type	Cable Ties
• Material	Nylon 6.6
• Color	Natural
• CSA Certified	Yes
• Mil. Std. Part Number	MS3368-4-9D
• UL Listed (File #E56854)	No
• UL Recognized (File #E56854)	Yes
• Length (In.)	7.4
• Length (mm)	188
• Width (In.)	.185
• Width (mm)	4.7
• CE Compliant	Yes
• Cross Section	Standard
• Head Height (In.)	.220
• Head Height (mm)	5.6
• Head Width (In.)	.320
• Head Width (mm)	8.1
• Locking Style	Locking
• Marker Type	Wrap
• Marker Write-On Area (In.)	.87 x 1.79
• Marker Write-On Area (mm)	22.1 x 45.5
• Material Flammability Rating	UL 94V-2
• Max. Bundle Diameter (In.)	1.75

▪ Max. Bundle Diameter (mm)	45
▪ Max. Continuous Use Temperature	185°F (85°C)
▪ Min. Loop Tensile Strength (Lbs.)	50
▪ Min. Loop Tensile Strength (N)	222
▪ Pricing Description	Marker Tie, Wrap, 7.4"L (188mm), Standard, Nylon, Natural
▪ Thickness (In.)	.052
▪ Thickness (mm)	1.3
▪ Tool	GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	50
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

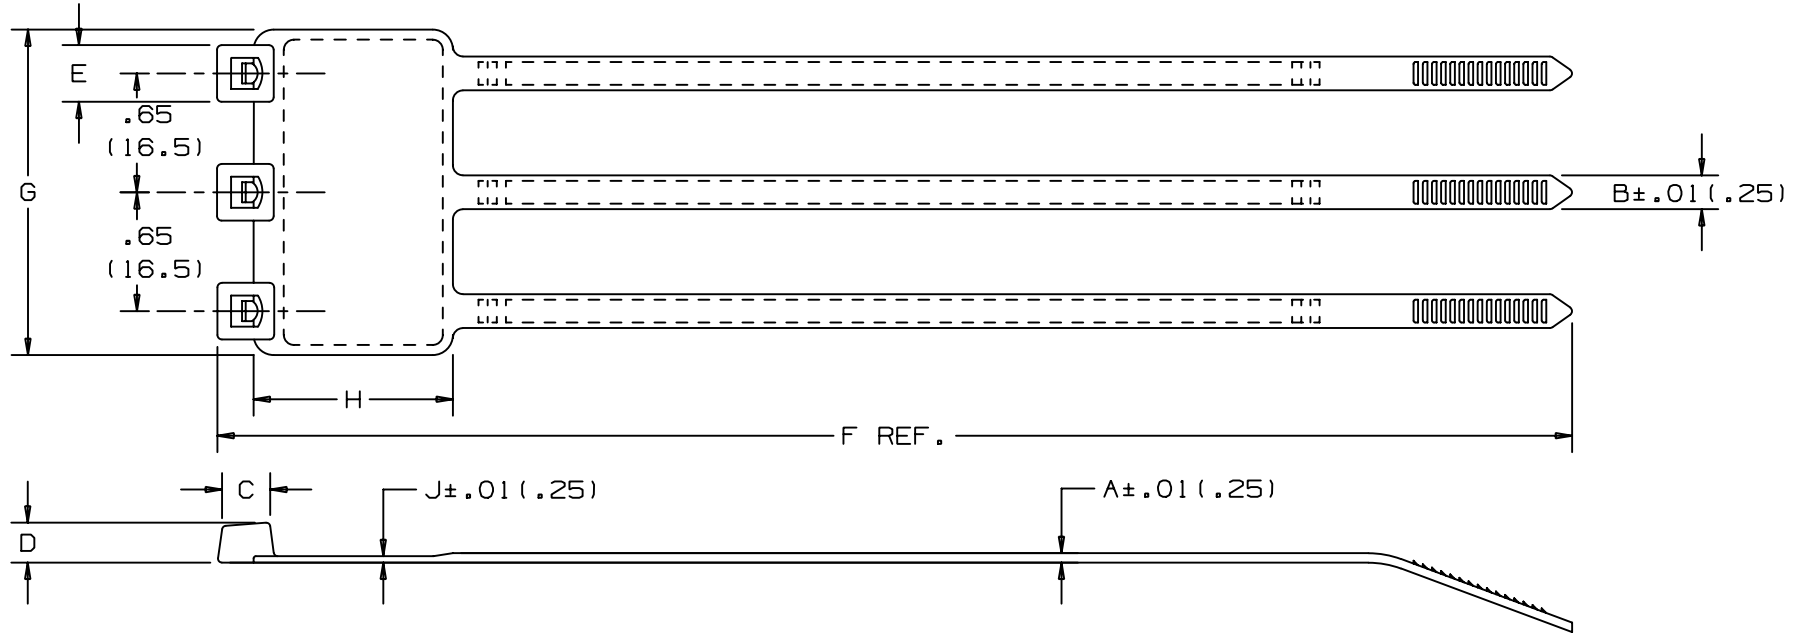

PANDUIT PART NO.*	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J in (mm)	WRITE-ON AREA in (mm)	MIN LOOP TENSILE lbs (N)	CROSS-SECTION	WEIGHT lbs/100pcs. (g)
	MIN. in (mm)	MAX. in (mm)													
PL3M2S	.37 (9.5)	1.75 (45)	.052 (1.3)	.185 (4.7)	.258 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	1.83 (46.5)	1.09 (27.7)	.035 (.9)	.87 X 1.79 (22.1 X 45.5)	50 ** (222)	STANDARD	1.12 (507)

**NOTES:**

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- \*\*2) LOOP TENSILE IS PER LEG OF STRAP.

CAD FILENAME/LAYERS										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.					
										<h1>PANDUIT</h1> <p>CORP. TINLEY PARK, ILLINOIS</p> <h2>PAN-TY MARKER TIE</h2> <h3>PLM SERIES</h3>					
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .000 (.XXX) ± .020 (.51) (.XX) ± .02 (.5) ANGLES ± .000			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
---	----	---		CORRECTED MATERIAL NAME, REMOVED TRADEMARK			----	---			DRAWN BY SARGIS	MAT'L: NYLON 6.6		SCALE NONE	
5	9/26/05	JABO		CORRECTED 'G' DIMENSION TO 1.83			17671	5			DATE 9-16-82	DRAWING NO. SS-17671		DWG A SIZE	
REV	DATE	BY	CHK	DESCRIPTION			ECN	R	CUST	SUP	CHK'D HVP				