



PLT2I-C0




- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Versatile cable ties can be used in countless applications
- One-piece construction for consistent performance and reliability
- Lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

■ Part Number	PLT2I-C0
■ RoHS Compliancy Status	Compliant
■ Part Description	Cable Tie, 8.0", Intermediate cross section
■ Product Type	Cable Ties
■ Material	Weather Resistant Nylon 6.6
■ Color	Black
■ CSA Certified	Yes
■ UL Listed (File #E56854)	Yes
■ UL Recognized (File #E56854)	Yes
■ Length (In.)	8.0
■ Length (mm)	203
■ Width (In.)	.142
■ Width (mm)	3.6
■ CE Compliant	Yes
■ Cross Section	Intermediate
■ Head Height (In.)	.180
■ Head Height (mm)	4.6
■ Head Width (In.)	.240
■ Head Width (mm)	6.1
■ Locking Style	Locking
■ Material Flammability Rating	UL 94V-2
■ Max. Bundle Diameter (In.)	2.00
■ Max. Bundle Diameter (mm)	51
■ Max. Continuous Use Temperature	185°F (85°C)
■ Min. Loop Tensile Strength (Lbs.)	40
■ Min. Loop Tensile Strength (N)	178

■ Pricing Description	Cable Tie, 8.0"L (203mm), Intermediate, Weather Resistant, Black
■ Thickness (In.)	.045
■ Thickness (mm)	1.1
■ Tool	GTS, GTSL, GS2B, PTS, PPTS, STS2
■ Min. Order UOM	PC
■ Min. Order Qty.	100
■ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

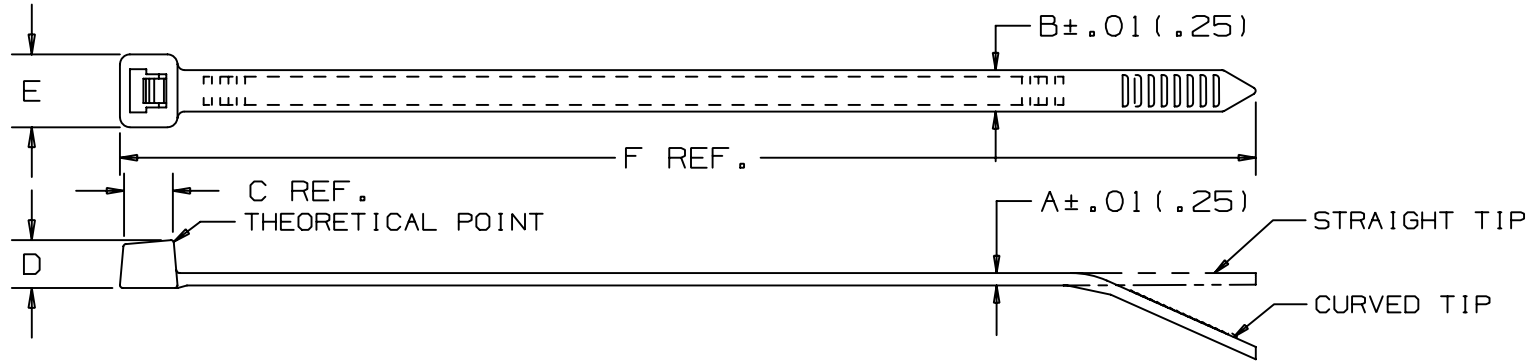

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT.6SM	.01 (.3)	.6 (15)	.030 (.76)	.070 (1.8)	.124 (3.1)	.095 (2.4)	.125 (3.2)	2.8 (71)	8 (36)	SUB-MINIATURE	CURVED	.02 (9.0)
PLT.7M	.03 (.8)	.68 (17)	.032 (.8)	.090 (2.3)	.148 (3.8)	.115 (2.9)	.180 (4.6)	3.1 (79)	18 (80)	MINIATURE	CURVED	.04 (16)
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	CURVED	.07 (32)
PLT1.5M	.06 (1.5)	1.25 (32)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	5.6 (142)	18 (80)	MINIATURE	CURVED	.10 (45)
PLT2M	.06 (1.5)	2.00 (51)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	8.0 (203)	18 (80)	MINIATURE	CURVED	.13 (59)
PLT1.5I	.06 (1.5)	1.38 (35)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	5.6 (142)	40 (178)	INTERMEDIATE	CURVED	.14 (64)
PLT2I	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	CURVED	.20 (91)
PLT2.5I	.06 (1.5)	2.50 (64)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	9.7 (246)	40 (178)	INTERMEDIATE	CURVED	.27 (122)

NOTES:

- 1) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- *2) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE & PART COLOR.

SS-5540_31.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
31	9/9/04	ERW		CORRECTED METRIC CONVERSIONS	5540	31		
30	2/12/03	JABO		CORRECTED PLT2M/2I 2.00 BUNDLE DIA (mm) TO (51)	5540	30		
---	----	--		REWORKED MATERIAL NAME	----	--		

PANDUIT

CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES
PLT SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ± (.XXX) ± .020 (.51)
 (.XX) ± .02 (.5) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

SCALE: NONE

MAT'L: NYLON 6.6

DRAWN BY: CEW
 DATE: 12-27-84
 CHK'D: HVP

DRAWING NO.: SS-5540
 SHEET 1

DWG SIZE: A