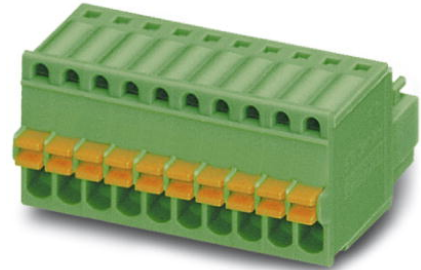


## FK-MC 0,5/ 3-ST-2,5

Order No.: 1881338

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1881338>

Plug, nominal current: 4 A, rated voltage: 100 V, pitch: 2.5 mm,  
number of positions: 3, connection method: Spring-cage connection

### Commercial data

EAN	4017918156589
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.002206 KG
Catalog page information	Page 120 (CC-2007)

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Pitch	2.5 mm
Dimension a	5 mm
Number of positions	3

**Technical data**

Insulating material group	I
Rated surge voltage (III/3)	1.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	100 V
Nominal cross section	0.5 mm <sup>2</sup>
Maximum load current	4 A (with 0.5 mm <sup>2</sup> conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Stripping length	8 mm

**Connection data**

Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	0.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	0.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	0.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20

**Certificates / Approvals**

Approval logo



**CUL**

Nominal voltage $U_N$	125 V
-----------------------	-------

Nominal current $I_N$	4 A
AWG/kcmil	28-20

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	4 A
AWG/kcmil	28-20
Certification	CB, CUL, GOST, UL, VDE-PZI

**Accessories**

Item	Designation	Description
<b>Marking</b>		
0804853	SK 2,54/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks
<b>Tools</b>		
1205202	SZS 0,4X2,0	Screwdriver, bladed, matches all screw terminal blocks up to 1.5 mm <sup>2</sup> connection cross section, blade width: 2.5 mm, without approvals

**Additional products**

Item	Designation	Description
<b>General</b>		
1881451	MC 0,5/ 3-G-2,5	Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 3, mounting: Soldering
1894817	MCD 0,5/ 3-G1-2,5	Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 3, mounting: Soldering
1894927	MCDV 0,5/ 3-G1-2,5	Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 3, mounting: Soldering
1881561	MCV 0,5/ 3-G-2,5	Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 3, mounting: Soldering

## Drawings

### Dimensioned drawing

---

