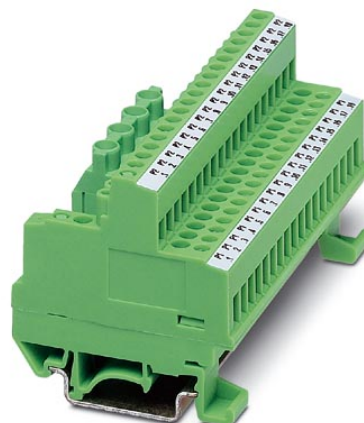


**FLK-PVB 2/36**

Order No.: 2295664

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2295664>

VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35/7.5 or NS 32

**Commercial data**

EAN	4017918173715
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.17444 KG
Catalog page information	Page 260 (IF-2007)

**Product notes**

WEEE/RoHS-compliant since:  
05/02/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	250 V AC/DC
Maximum total current per potential	16 A
Potential connections	Per potential(P1, P2) 2 power/18 distributor terminal blocks
Length	51.6 mm

Height	51.7 mm
Width	96 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	III

**Connection data, supply**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	6 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	4 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M 3

**Connection data, distribution**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M 3

**Certificates / Approvals**

Approval logo



**requested approbations**

Certification	CUL, GOST, UL
---------------	---------------

**Accessories**

Item	Designation	Description
------	-------------	-------------

**Plug/Adapter**

0201647	RPS	Reducing plug, for transition from 4 mm diameter test plug socket, insulation: gray
---------	-----	---

**Drawings**

Circuit diagram

