

S-PT1-2PE-24DC/P

Order No.: 2818216



Spare PCB for screw on module for conduit systems, with two conductor protection for a 2-core floating signal circuit. Design: 24 V DC

Commercial data	
EAN	4017918148409
Pack	10 pcs.
Customs tariff	85363010
Weight/Piece	0.02663 KG
Catalog page information	Page 55 (TT-2002)

Product notes

WEEE/RoHS-compliant since:
07/27/2006



Technical data	
General	
Ambient temperature (operation)	-40 °C ... 65 °C
Mounting type	Connection-specific intermediate plugging
Design	Screw-on module
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

Nominal voltage U_N	24 V DC
Max. operating voltage U_{max}	28 V DC
Nominal current I_N	250 mA (25°C)
Operating effective current I_C at U_C	$\leq 5 \mu A$
Nominal discharge surge current I_n (8/20) μs (Core-Core)	10 kA
Output voltage limitation at 1 kV/ μs (Core-Core) spike	$\leq 40 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 450 V$
Protection level U_p (Core-Core)	$\leq 55 V$
Protection level U_p (Core-Earth)	$\leq 550 V$
Response time t_A (Core-Core)	$\leq 1 ns$
Response time t_A (Core-Earth)	$\leq 100 ns$
Resistance in series	10 Ω

Connection data

Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16

Certificates / Approvals

Certification


GOST, UL

Certification Ex:

CUL-EX LIS, UL-EX LIS

Drawings

Circuit diagram

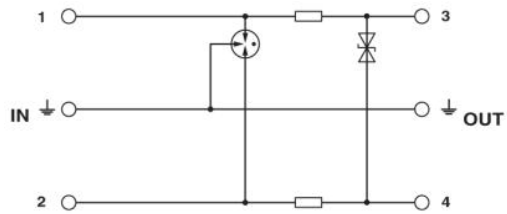

Approval logo (Ex area)

