

Wall Plug-Ins

Class 2




UL File E245587

DC Power Supply

:: Description

Triad prepackaged wall plug-in power supplies decrease product design time. These plug-in power sources eliminate the need for internal power supply cooling devices, thereby reducing the noise level, size and weight of the end product. In addition, these compact power sources keep heat away from sensitive circuits, and supply a safer lower output to the end product. Wall plug-in power sources are completely enclosed to prevent tampering. And since they carry many required agency listings, their use aids in gaining agency approvals. Offered in a wide range of popular voltages, the plug-in power sources are available in AC/DC unregulated models with generous six foot cord lengths. Available in 60 Hz only.

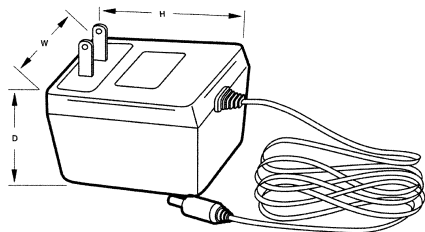

:: Wall Plug-Ins

Type No.	Input		Output		Type	Dimensions (mm)		
	VAC	Watts	VDC	IDC (A)		H	W	D
WDU6-100	120	6.0	6.0	0.10	AC/DC Unreg.	56	43	37
WDU6-200	120	3.0	6.0	0.20	AC/DC Unreg.	60	43	39
WDU6-300	120	4.5	6.0	0.30	AC/DC Unreg.	60	43	39
WDU6-600	120	7.5	6.0	0.60	AC/DC Unreg.	70	50	41
WDU6-800	120	10.0	6.0	0.80	AC/DC Unreg.	70	50	41
WDU6-1000	120	12.0	6.0	1.00	AC/DC Unreg.	70	50	41
WDU6-1200	120	15.0	6.0	1.20	AC/DC Unreg.	70	50	41
WDU75-100	120	6.0	7.5	0.10	AC/DC Unreg.	56	43	37
WDU75-200	120	3.5	7.5	0.20	AC/DC Unreg.	60	43	39
WDU75-300	120	4.5	7.5	0.30	AC/DC Unreg.	60	43	39
WDU75-800	120	11.5	7.5	0.80	AC/DC Unreg.	70	50	41
WDU75-1000	120	15.0	7.5	1.00	AC/DC Unreg.	71	56	48
WDU9-100	120	2.3	9.0	0.10	AC/DC Unreg.	60	43	39
WDU9-300	120	5.0	9.0	0.30	AC/DC Unreg.	60	43	39
WDU9-500	120	18.5	9.0	0.50	AC/DC Unreg.	70	50	41
WDU9-1000	120	15.5	9.0	1.00	AC/DC Unreg.	80	60	48
WDU9-1200	120	18.5	9.0	1.20	AC/DC Unreg.	80	60	48
WDU9-2300	120	33.0	9.0	2.30	AC/DC Unreg.	85	68	55
WDU12-100	120	2.8	12.0	0.10	AC/DC Unreg.	60	43	39
WDU12-300	120	6.5	12.0	0.30	AC/DC Unreg.	70	50	41
WDU12-600	120	12.5	12.0	0.60	AC/DC Unreg.	80	60	48
WDU12-1200	120	23.5	12.0	1.20	AC/DC Unreg.	80	60	48
WDU12-1900	120	33.0	12.0	1.90	AC/DC Unreg.	85	68	55
WDU15-200	120	5.0	15.0	0.20	AC/DC Unreg.	60	43	39
WDU15-600	120	15.0	15.0	0.60	AC/DC Unreg.	80	60	48
WDU15-1000	120	24.0	15.0	1.00	AC/DC Unreg.	80	60	48
WDU15-1700	120	37.0	15.0	1.70	AC/DC Unreg.	85	68	55
WDU18-100	120	6.0	18.0	0.10	AC/DC Unreg.	56	43	37
WDU18-200	120	6.5	18.0	0.20	AC/DC Unreg.	70	50	41
WDU18-250	120	12.0	18.0	0.25	AC/DC Unreg.	64	51	41
WDU18-300	120	9.0	18.0	0.30	AC/DC Unreg.	70	50	41
WDU18-600	120	17.0	18.0	0.60	AC/DC Unreg.	80	60	48
WDU18-1000	120	27.5	18.0	1.00	AC/DC Unreg.	80	60	48
WDU18-1400	120	34.0	18.0	1.40	AC/DC Unreg.	85	68	55
WDU24-200	120	9.0	24.0	0.20	AC/DC Unreg.	60	43	39
WDU24-300	120	11.8	24.0	0.30	AC/DC Unreg.	70	50	41
WDU24-500	120	18.0	24.0	0.50	AC/DC Unreg.	80	60	48
WDU24-800	120	28.5	24.0	0.80	AC/DC Unreg.	80	60	48
WDU24-1200	120	38.0	24.0	1.20	AC/DC Unreg.	85	68	55

Note: Specifications subject to change without notice.


Wall Plug-Ins

Class 2



AC Power Supply

UL File E245587

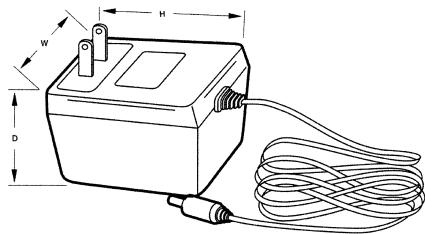

:: Description

Triad prepackaged wall plug-in power supplies decrease product design time. These plug-in power sources eliminate the need for internal power supply cooling devices, thereby reducing the noise level, size and weight of the end product. In addition, these compact power sources keep heat away from sensitive circuits, and supply a safer lower output to the end product. Wall plug-in power sources are completely enclosed to prevent tampering. And since they carry many required agency listings, their use aids in gaining agency approvals. Offered in a wide range of popular voltages, the plug-in power sources are available in AC/AC unregulated models with generous six foot cord lengths. Available in 60 Hz only.

:: Wall Plug-Ins

Type No.	Input		Output		Type	Dimensions (mm)		
	VAC	Watts	VAC	IAC (A)		H	W	D
WAU12-200	120	4.0	12.0	0.20	AC/AC Unreg.	60	43	39
WAU12-500	120	8.8	12.0	0.50	AC/AC Unreg.	70	50	41
WAU12-1000	120	17.0	12.0	1.00	AC/AC Unreg.	70	50	41
WAU12-1500	120	24.0	12.0	1.50	AC/AC Unreg.	80	60	48
WAU12-2000	120	33.0	12.0	2.00	AC/AC Unreg.	80	60	48
WAU12-2500	120	38.0	12.0	2.50	AC/AC Unreg.	85	68	55
WAU16-400	120	9.0	16.0	0.40	AC/AC Unreg.	70	50	41
WAU16-500	120	11.2	16.0	0.50	AC/AC Unreg.	80	60	48
WAU16-1000	120	21.5	16.0	1.00	AC/AC Unreg.	80	60	48
WAU16-2400	120	47.0	16.0	2.40	AC/AC Unreg.	85	68	55
WAU20-200	120	6.0	20.0	0.20	AC/AC Unreg.	70	50	41
WAU20-500	120	13.5	20.0	0.50	AC/AC Unreg.	80	60	48
WAU20-2000	120	48.0	20.0	2.00	AC/AC Unreg.	85	68	55
WAU24-200	120	7.2	24.0	0.20	AC/AC Unreg.	70	50	41
WAU24-450	120	15.0	24.0	0.45	AC/AC Unreg.	70	50	41
WAU24-750	120	23.5	24.0	0.75	AC/AC Unreg.	80	60	48
WAU24-1000	120	32.0	24.0	1.00	AC/AC Unreg.	80	60	48
WAU24-1800	120	52.2	24.0	1.80	AC/AC Unreg.	85	68	55

Note: Specifications subject to change without notice.

Technical Notes

1. Inside (tip) - positive (+), outside - negative (-)
2. Plug use on DC and AC models

