

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)


- [Sign In](#)
- [Register](#)

[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors - Wire to Board - Power](#) > [Product Feature Selector](#) > Product Details

350210-1 Product Details

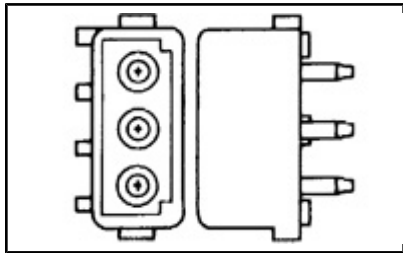

350210-1



[Active](#)

.200" Centerline, 250 V, 13 A max.



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Header
- Contact Diameter = 2.13 mm
- Number of Circuits = 3
- 5.08 mm Centerline, Matrix
- In-Line Contact Layout

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(3\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [3 circuit mate-n-lok rc board header](#) (PDF, English)

Catalog Pages/Data Sheets:

- [SOFT SHELL PIN AND SOCKET CONNECTORS](#) (PDF, English)

Product Specifications:

- [No title](#) (PDF, English)

Application Specifications:

- [MATE-N-LOK Commercial Pin And Socket Contacts](#) (PDF, English)
- [MATE-N-LOK Commercial Pin and Socket Contacts](#) (PDF, Japanese)

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version T)
- [3D Model](#) (IGES, Version T)
- [3D Model](#) (STEP, Version T)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Mating Products \(3\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)**Product Type Features:**

- Product Type = Header
- Number of Circuits = 3
- Mount = PCB Thru Mount
- Color = Natural
- Lock Type = Detent Lock
- PCB Thickness (mm [in]) = 1.57 [0.062]
- Mount Angle = Vertical
- Connector Line = Commercial MATE-N-LOK
- Comment = Use standard tail for 1.57 [.062] thick PC Board.

Electrical Characteristics:

- Voltage (VAC) = 250
- Current Rating (Amps.) = 13

Termination Related Features:

- Termination (Solder) Post Length (mm [in]) = 4.19 [0.165]

Body Related Features:

- Contact Diameter (mm [in]) = 2.13 [0.084]
- Centerline, Matrix (mm [in]) = 5.08 [.200]

Contact Related Features:

- Contact Layout = In-Line
- Contact Type = Pin
- Contact Material = Phosphor Bronze
- Contact Mating Area Plating Material = Pre-Tin
- CompactPCI = No

Housing Related Features:

- Housing Material = Nylon
- Housing Flammability Rating = UL 94V-2

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved