


5-102570-6 Product Details



5-102570-6

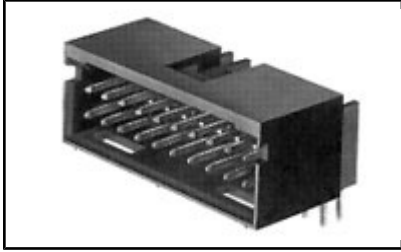

[Active](#)

.100 inch AMPMODU Headers



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Header
- Header Type = Shrouded
- Number of Rows = Dual
- Number of Positions = 16
- Mating Post Length = 8.08 mm

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [HDR ASSY, MOD II, SHROUDED, .100X.100 C/L 4 SIDES, ...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Header
- [Number of Positions](#) = 16
- [Shrouded End Dimension \(mm \[in\]\)](#) = 3.81 [0.150]
- [Mount Angle](#) = Right Angle
- [PCB Retention Feature](#) = No
- [Surface Mount Compatible](#) = No
- [Board Standoff](#) = With
- [Mounting Ears](#) = Without
- [Mating Connector Lock](#) = With
- [Mating Connector Lock Type](#) = Detent Windows
- [Housing Style](#) = 4-Sided
- Post Size (mm [in]) = 0.64 [.025]
- Profile = Standard

Mechanical Attachment:

- [Mating Post Length \(mm \[in\]\)](#) = 8.08 [0.318]
- [Panel Attachment](#) = Without

Electrical Characteristics:

- Current Rating (Amps.) = 3
- Insulation Resistance (M \bullet) = 5,000
- Dielectric Withstanding Voltage (V) = 750

Termination Related Features:

- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.43 [0.135]
- Solder Tail Contact Plating = Tin over Nickel

Body Related Features:

- [Header Type](#) = Shrouded
- [Number of Rows](#) = Dual
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 2.54 [.100 x .100]
- [Selectively Loaded](#) = No
- [Mount Type](#) = PC Board

Contact Related Features:

- [Contact Mating Area Plating](#) = Gold (15)
- Contact Shape = Square
- Contact Material = Phosphor Bronze
- Approved Standards = UL E28476, CSA LR7189

Housing Related Features:

- Housing Material = Thermoplastic
- Housing Color = Black
- Housing Flammability Rating = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- [High Temperature Housing](#) = No
- Operating Temperature (°C) = -55 – +125

Operation/Application:

- [High Speed Serial Data Connector](#) = No

Other:

- Brand = Tyco Electronics