

SINGLE PHASE BRIDGE

Power Modules

Features

- Universal, 3 way terminals:
push-on, wrap around or solder
- High thermal conductivity package,
electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- UL E300359 approved 
- Nickel plated terminals solderable using Lead-Free solder;
Solder Alloy Sn/Ag/Cu (SAC305); Solder temperature 260-275°C
- RoHS compliant

25 A
35 A

Description

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

Major Ratings and Characteristics

Parameters	26MB-A	36MB-A	Units
I_O	25	35	A
@ T_C	65	60	°C
I_{FSM} @ 50Hz	400	475	A
@ 60Hz	420	500	A
I^2t @ 50Hz	790	1130	A ² s
@ 60Hz	725	1030	A ² s
V_{RRM} range	200 to 1200		V
T_J	-55 to 150		°C

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max.
26MB..A 36MB..A	20	200	275	2
	40	400	500	
	60	600	725	
	80	800	900	
	100	1000	1100	
	120	1200	1300	

Forward Conduction

Parameters	26MB-A	36MB-A	Units	Conditions
I_O Maximum DC output current @ Case temperature	25	35	A	Resistive or inductive load
	20	28	A	Capacitive load
	65	60	°C	
I_{FSM} Maximum peak, one-cycle non-repetitive forward current	400	475	A	t = 10ms No voltage reappplied
	420	500		t = 8.3ms
	335	400		t = 10ms 100% V_{RRM} reappplied
	350	420		t = 8.3ms
I^2t Maximum I^2t for fusing	790	1130	A ² s	t = 10ms No voltage reappplied
	725	1030		t = 8.3ms
	560	800		t = 10ms 100% V_{RRM} reappplied
	512	730		t = 8.3ms
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	5.6	11.3	KA ² √s	I^2t for time $t_x = I^2\sqrt{t} \sqrt{t_x}$; 0.1 ≤ t_x ≤ 10ms, $V_{RRM} = 0V$
$V_{F(TO)1}$ Low-level of threshold voltage	0.76	0.79	V	(16.7% × π × $I_{F(AV)}$) < I < π × $I_{F(AV)}$, @ T_J max.
$V_{F(TO)2}$ High-level of threshold voltage	0.92	0.96		(I > π × $I_{F(AV)}$), @ T_J max.
r_{t1} Low-level forward slope resistance	6.8	5.8	mΩ	(16.7% × π × $I_{F(AV)}$) < I < π × $I_{F(AV)}$, @ T_J max.
r_{t2} High-level forward slope resistance	5.0	4.5		(I > π × $I_{F(AV)}$), @ T_J max.
V_{FM} Maximum forward voltage drop	1.11	1.14	V	$T_J = 25^\circ C$, $I_{FM} = 40A_{PK}$ (26MB) tp = 400μs
				$T_J = 25^\circ C$, $I_{FM} = 55A_{PK}$ (36MB)
I_{RRM} Max. DC reverse current	10	10	μA	$T_J = 25^\circ C$, per diode at V_{RRM}
V_{INS} RMS isolation voltage base plate	2700	2700	V	f = 50 Hz, t = 1s

Thermal and Mechanical Specifications

Parameters	26MB-A	36MB-A	Units	Conditions
T _J Junction temperature range	-55 to 150 °C			
T _{stg} Storage temperature range	-55 to 150 °C			
R _{thJC} Max. thermal resistance junction to case	1.7	1.2	K/W	Per bridge
R _{thCS} Max. thermal resistance, case to heatsink	0.2		K/W	Mounting surface , smooth, flat and greased
wt Approximate weight	20		g	
T Mounting Torque ± 10%	2.0		Nm	Bridge to heatsink

Ordering Information Table

Device Code

36

MB

120

A

①

②

③

④

1 - Current rating code: 26 = 25A (Avg)
36 = 35A (Avg)

2 - Circuit configuration:
MB = Single phase european coding

3 - Voltage code: MB series = code x 10 = V_{RRM}

4 - Diode bridge rectifier:
A = 26MB, 36MB Series

Outline Table

0.8 (.03) 6.3 (.25)

10.5 (.41) 20.3 (.80)

21.5 (0.85) ±0.5 ±0.5 9.5 (0.37)

5 (0.2) ±12.7 (0.5) 28.5 (1.12)

28.5 (1.12)

Suggested plugging force:
200 N max; axially applied to faston terminals

All dimensions in millimetres (inches)

Not To Scale

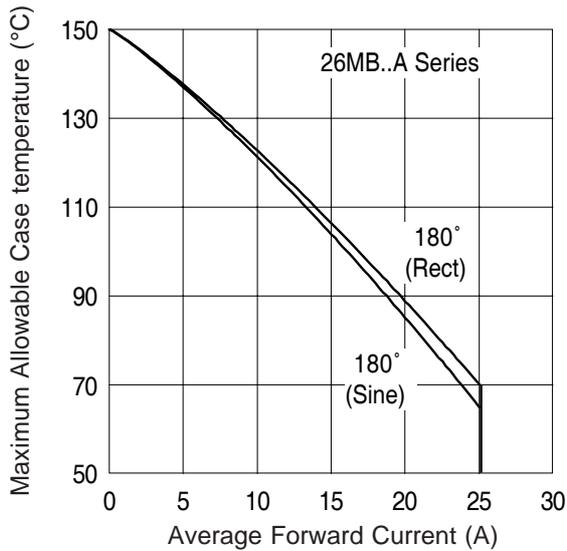


Fig. 1 - Current Ratings Characteristics

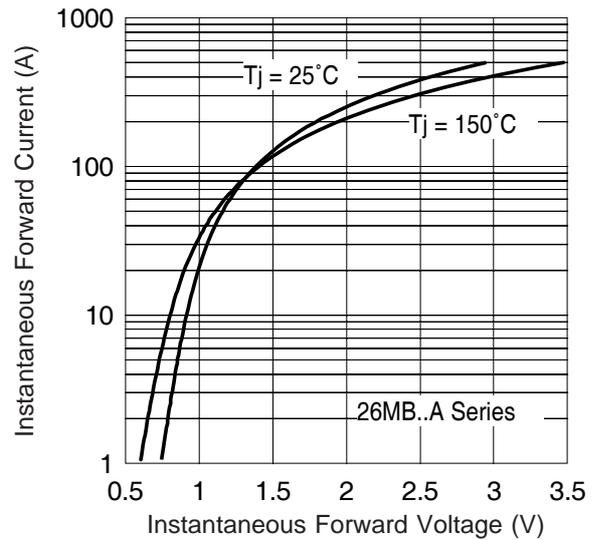


Fig. 2 - Forward Voltage Drop Characteristics
Maximum Allowable Ambient = T_e

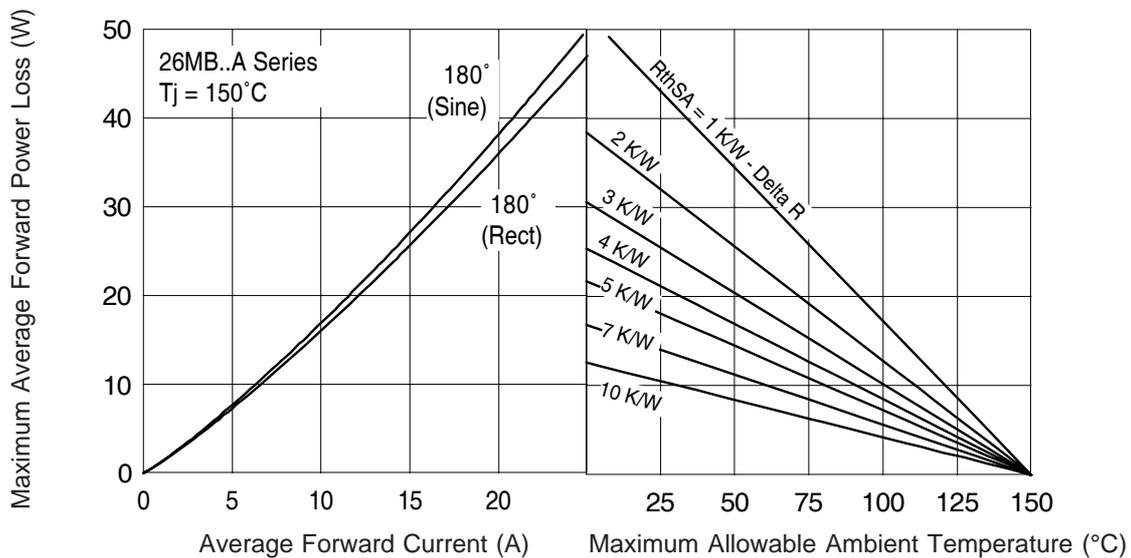


Fig. 3 - Total Power Loss Characteristics

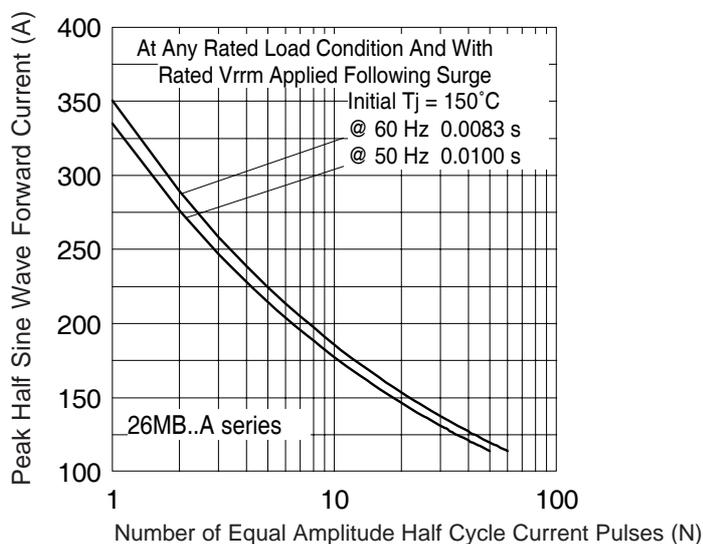


Fig. 4 - Maximum Non-Repetitive Surge Current

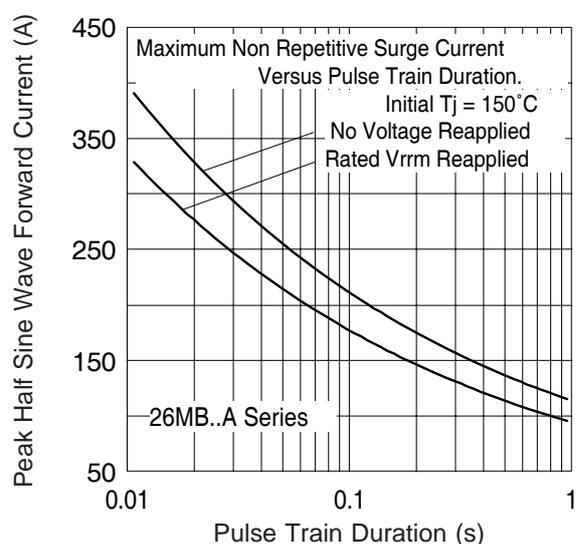


Fig. 5 - Maximum Non-Repetitive Surge Current

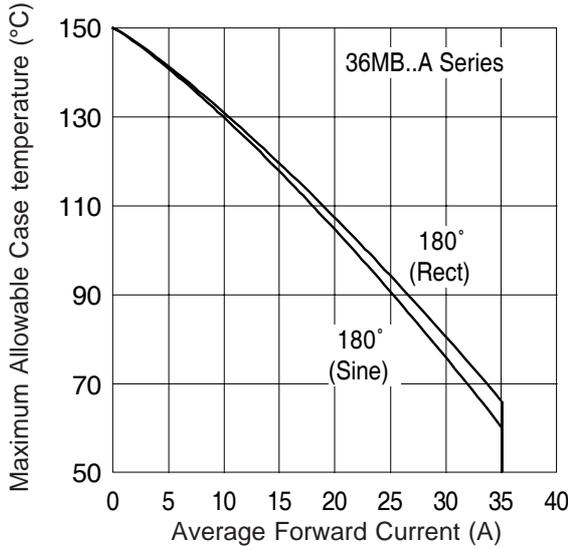


Fig. 6 - Current Ratings Characteristics

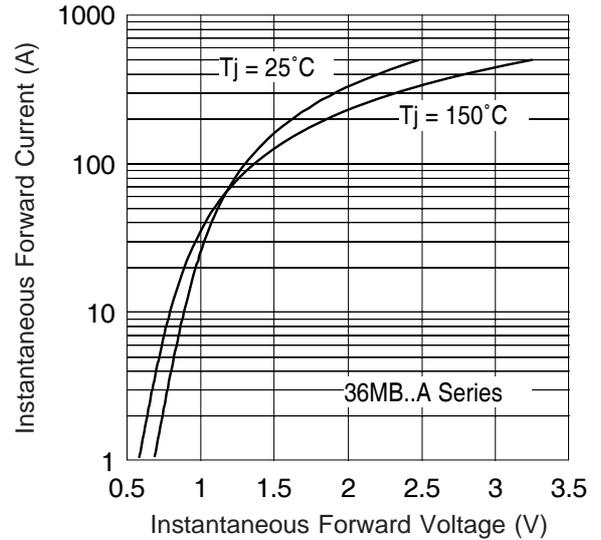


Fig. 7 - Forward Voltage Drop Characteristics

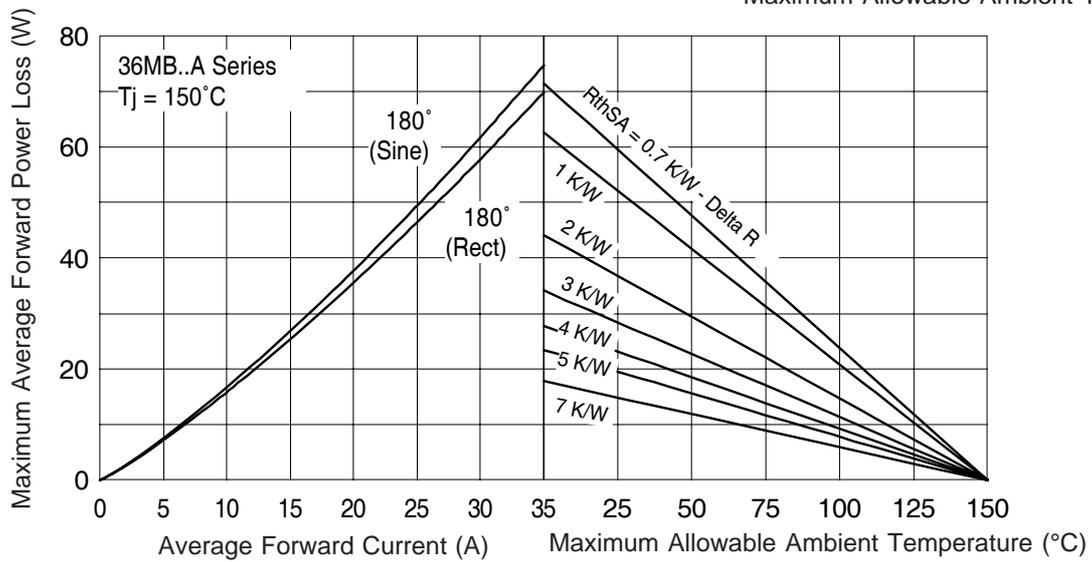


Fig. 3 - Total Power Loss Characteristics

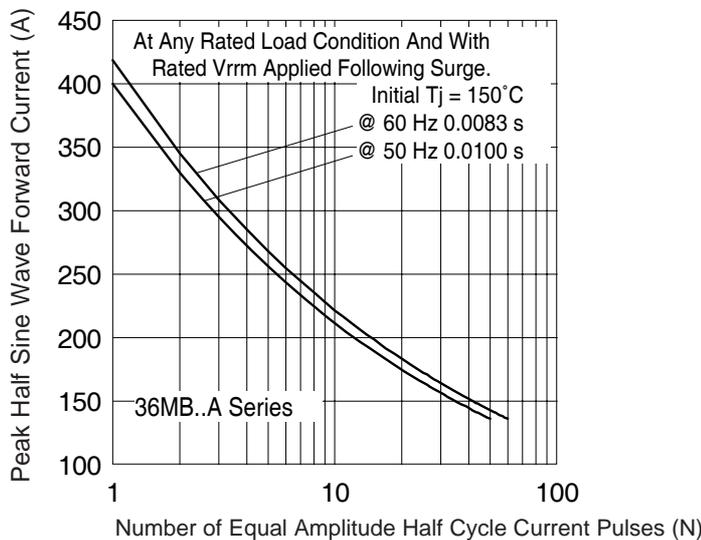


Fig. 9 - Maximum Non-Repetitive Surge Current

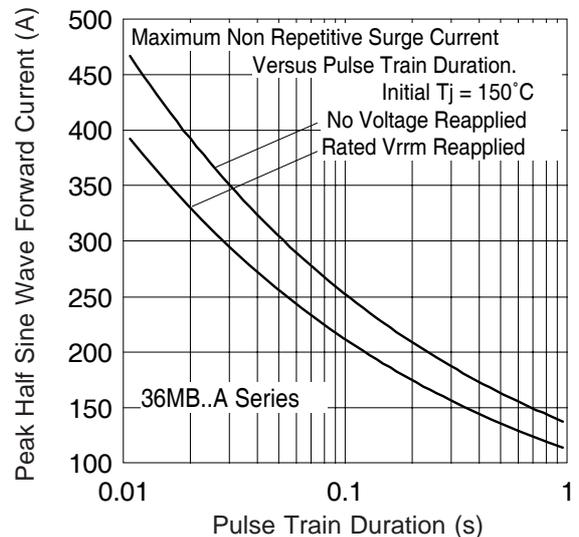


Fig. 10 - Maximum Non-Repetitive Surge Current

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial and Consumer Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
09/06



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.